

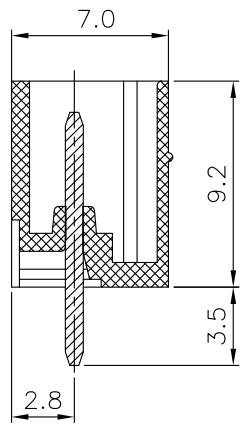
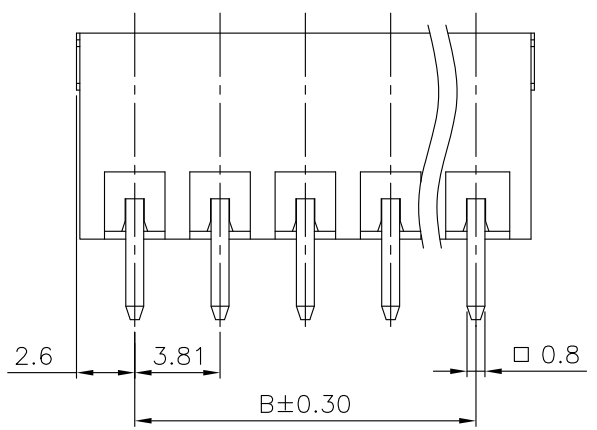


REV.	SPECIFICATION	ECN NO.	APPD.

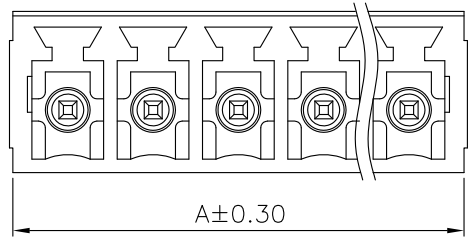

**Material:**  
Housing: Thermoplastic Polyester UL94V-0.  
Contact Pin: Copper Alloy, Tin Plated.

**Electrical Characteristics:**  
Voltage Rating: 300V.  
Current Rating: 10A.  
Withstanding Voltage: 1.6KV.  
Operating Temperature: -30°C~+105°C.  
**\*RoHS Compliant**

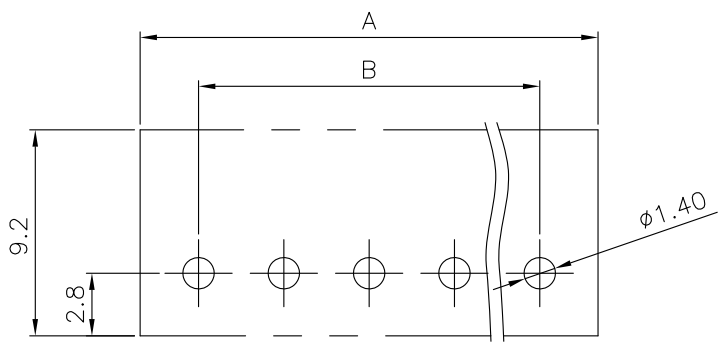

P.C.Board Layout

**8930-** Series    **D** Pitch 3.81mm    **070092** Manufacturing Code    **G** G:Green B:Black Y:Grey U:Blue    **BA** BA:Close Type    **xx** No. of Positions    **S** S:Straight    **B** B: Bulk Package for 2~5 Pos. Box Package for 6~24 Pos.

Position	02 Thru 24
Dimension	
A	No. of Positions *3.81+1.09
B	(No. of Positions -1) *3.81

Tolerances	Dwg. No.	8930D01003
x = ±0.5	Projection	$\oplus$ $\triangleleft$
.x = ±0.30	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	FL10/05'12

Title:  
8930 Series  
3.81mm Terminal Block  
(8100-xxMTS11-02)  
①780

**OUPIN**  
**OUPIN ELECTRONIC(KUNSHAN) CO., LTD.**  
P/N: 8930-D070092GBAxxSB

SHEET	1/1	Ver.No.	A3
-------	-----	---------	----