
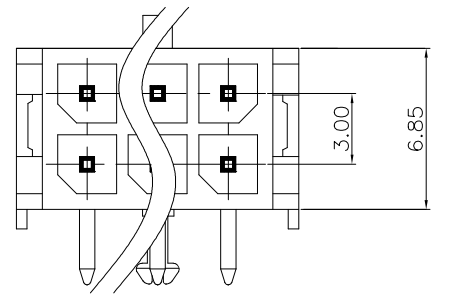
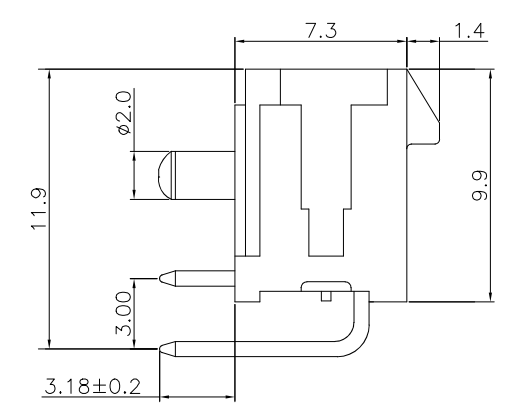


REV.	SPECIFICATION	ECN NO.	APPD.

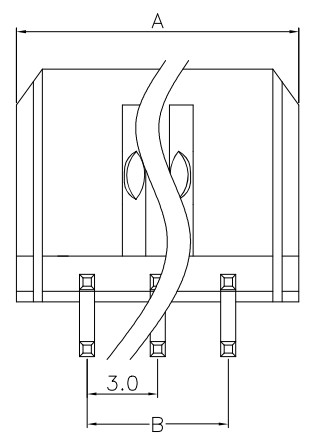

Series 4976-
 Double Row 2
 No. of Pin Per Row X
 xx
 T R B
 B: Bulk Package
 R: Right Angle
 T: Tin Plated

Material:

Housing: LCP, UL94V-0.

Contact: Brass.

Plating: 120~200u" Min Tin Plated over Nickel 30u" Min.

Electrical Characteristics:

Current Rating:

Wire Size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5A	5A	4A	3A	2A	1A

Voltage Rating: 250V DC/AC.


Dielectric Withstanding Voltage: 1500V AC.

Insulator Resistance: 1000MΩ min.

Contact Resistance: 10mΩ max.

Operating Temperature: -40°C ~+105°C.

***RoHS Compliant**

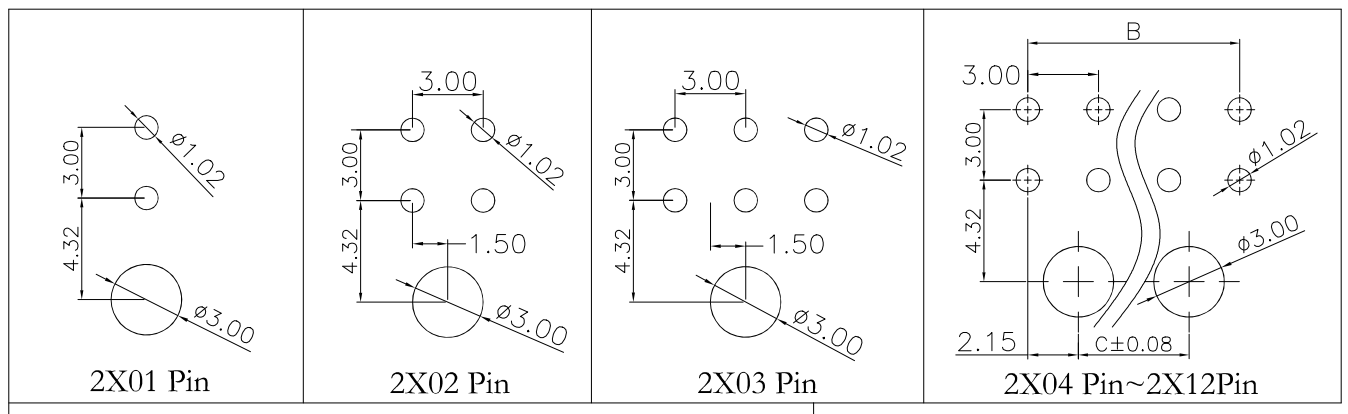

Positions	Dimension		
	A	B	C
2X01	6.65		
2X02	9.65	3.00	
2X03	12.65	6.00	
2X04	15.65	9.00	4.70
2X05	18.65	12.00	7.70
2X06	21.65	15.00	10.70
2X07	24.65	18.00	13.70
2X08	27.65	21.00	16.70
2X09	30.65	24.00	19.70
2X10	33.65	27.00	22.70
2X11	36.65	30.00	25.70
2X12	39.65	33.00	28.70

P.C. Board Layout


Tolerances	Dwg. No.	4976D01002		Title:	4976 Series
.x = ±0.25	Projection	⊕ ⊖			3.0mm Wafer Dip
.xx = ±0.15	Unit	mm	Scale	1:1	Right Angle
.xxx = ±0.05	Drawn By	Martin 07/18'22		⊕667	

OUPIIN
 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
 P/N: 4976-2XxxTRB


SHEET	1/2	Ver.No.	C2
-------	-----	---------	----

REV.	SPECIFICATION	ECN NO.	APPD.


2X01P




2X02P




2X03P




2X04P




2X05P




2X06P




2X07P




2X08P

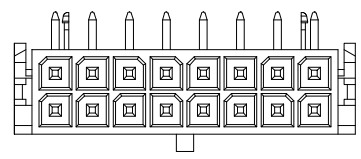


2X09P

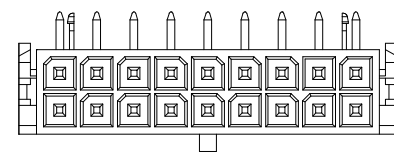


2X10P

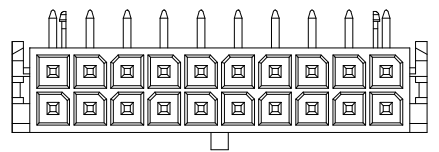

2X11P

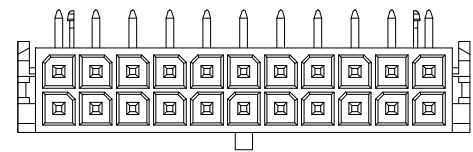

2X12P

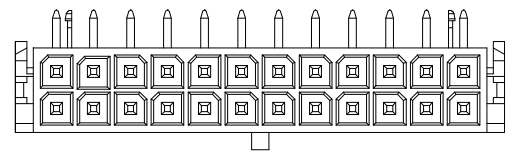

Tolerances .x = ±0.25 .xx = ±0.15 .xxx = ±0.05	Dwg. No.	4976D01002		Title: 4976 Series 3.0mm Wafer Dip Right Angle Φ667	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 4976-2XxxTRB	
	Projection					
	Unit	mm	Scale			1:1
	Drawn By	Martin 07/18'22				SHEET