

REV.	SPECIFICATION	ECN NO.	APPD.




Material:

Terminal: Copper Alloy.
 Recommend Wire: 28AWG to 32AWG.


Electrical Characteristics:

Current Rating: 1 AMP.
 Contact Resistance: 20mΩ max. at DC 100mA.
 Operating Temperature: -25°C~+85°C.


***RoHS Compliant**

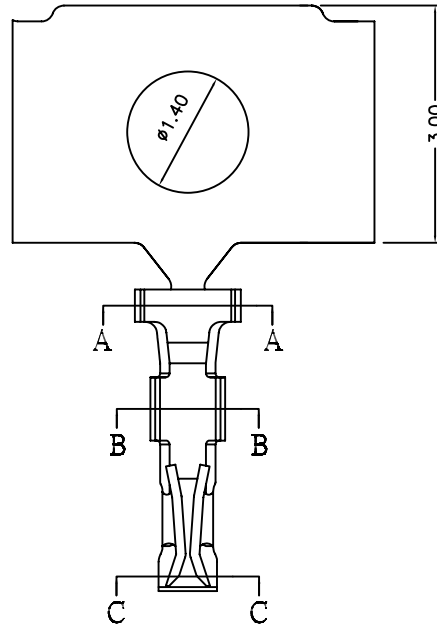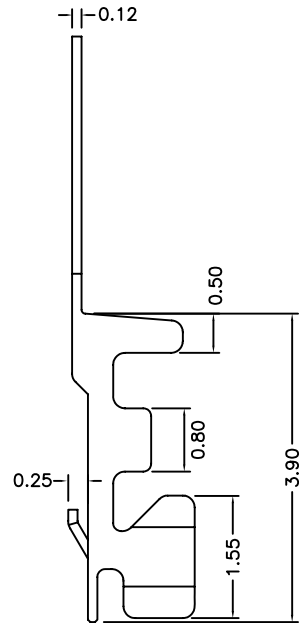

Section A-A





Section B-B



Section C-C

4472- PIN-T-20K

Series T: Tin Plated 20K Pins Per Reel

Tolerances	Dwg. No.	4472D01004	Title:		 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 4472-PIN-T-20K SHEET 1/1 Ver.No. A2
x = ±0.5	Projection		4472 Series		
.x = ±0.25	Unit	mm	Scale	1:1	
.xx = ±0.15	Drawn By	Peggy01/28'13	1.00mm Terminal		