

REV.	SPECIFICATION	ECN NO.	APPD.





**Material:**

Contacts: Copper Alloy.

Recommend Wire: 28AWG to 32AWG.

Insulation O.D. 1.0mm(MAX)

**\*RoHS Compliant**

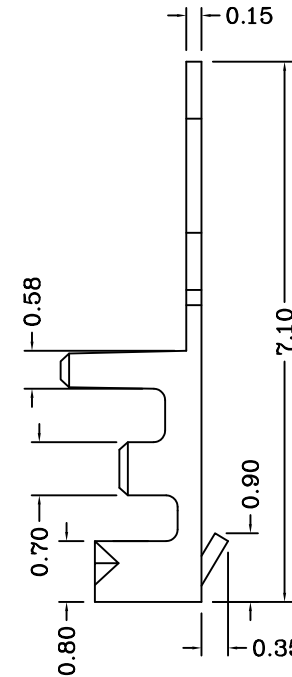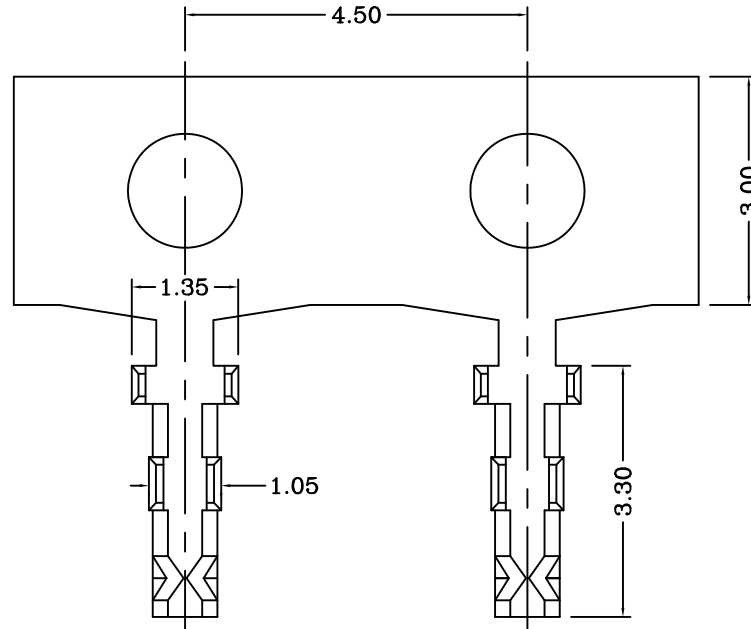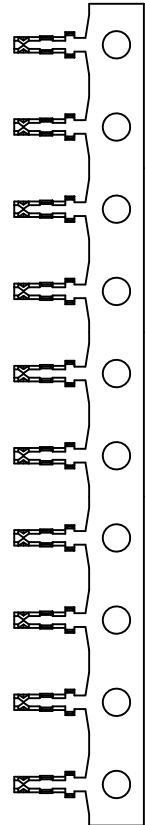

4573-  
Series

PIN-T-15K  
T: Tin Plated 15K Pins Per Reel

<b>Tolerances</b>	<b>Drawn No.</b>	4573P02001		<b>Title:</b>	
x = ±0.5	<b>Projection</b>	⊕ ◀		4573 Series	
.x = ±0.35	<b>Unit</b>	mm	<b>Scale</b>	Wire To Board Socket	
.xx = ±0.25	<b>Drawn By</b>	Vic Lyu10/29'15		Terminal	

0704



OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.

P/N: 4573-PIN-T-15K

SHEET	1/1	Ver.No.	A3
-------	-----	---------	----