
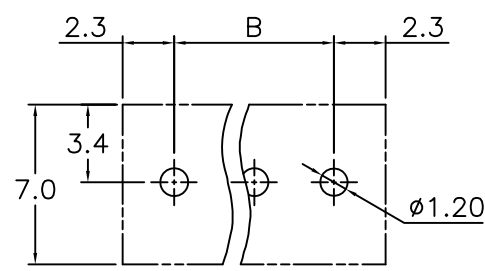
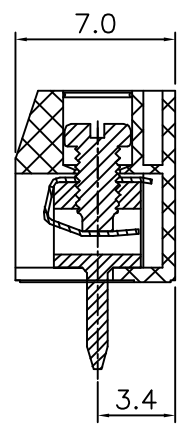
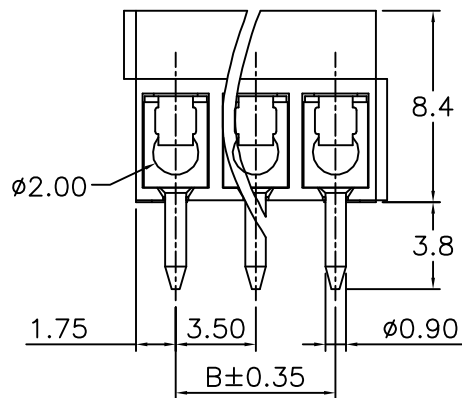


REV.	SPECIFICATION	ECN NO.	APPD.

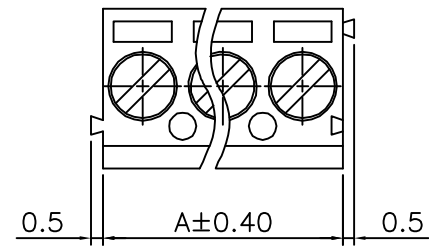

P.C. Board Layout

Material:
Housing: Nylon66, UL94V-0.
Solder Pin: Brass, Tin Plated.
Wire Guard: Stainless Steel.
Screw: Steel, Zinc Plated, M2.
Electrical Characteristics:
Voltage Rating: 125V.
Current Rating: 10A.
Solid Wire(AWG): 16-26.
Stranded Wire(AWG): 16-26.
Torque: 1.7Lb-In.
Wire Strip Length: 5-6mm.
Withstanding Voltage: 1.25KV.
Operating Temperature: -40°C~+115°C.
***RoHS Compliant**

8931- C 070084 U AA xx S B
Series C:Pitch 3.5mm Manufacturing Code U:Blue AA:Slotted No. of Positions S:Straight B:Bulk Package
Y: Grey G: Green

Position	2 Thru 24
Dimension	
A	No. of PositionsX3.5
B	(No. of Positions-1)X3.5

Tolerances	Dwg. No.	8931D02006	Title:		 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 8931-C070084UAxxSB
x = ±0.50	Projection		8931 Series		
.x = ±0.30	Unit	mm	Scale	1:1	3.5mm Terminal Block
.xx = ±0.15	Drawn By	Scott	09/13'16		(Old P/N: 8300-XXTS41-04)
				① 780	SHEET 1/1 Ver.No. A1