

REV.	SPECIFICATION	ECN NO.	APPD.





Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
 Contacts: Copper Alloy.
 Plated: Gold Plated in Contact Area, Nickel Plated Overall.

Electrical Characteristics:

Current Rating: 1 AMP.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 20mΩ max. at DC 100mA.
 Operating Temperature: -55°C~+105°C.

***RoHS Compliant**

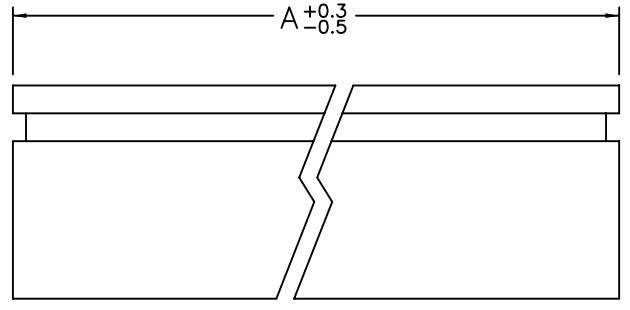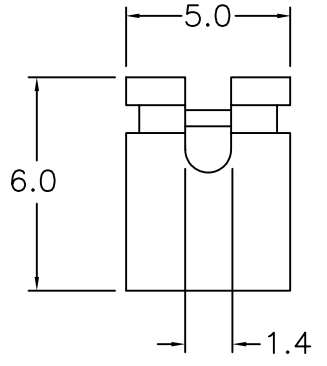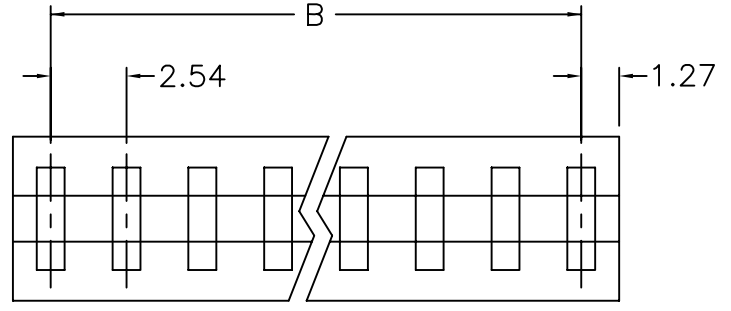

Position	Dimension	
	A	B
2	5.08	2.54
3	7.62	5.08
4	10.16	7.62
5	12.70	10.16
6	15.24	12.70
7	17.78	15.24
8	20.32	17.78
9	22.86	20.32
10	25.40	22.86

2006- 2 X xx B
 Series 2: Staion Per Shunt No.of Total Shunt B: Bulk Package

Tolerances x = ±0.5 .x = ±0.25 .xx = ±0.15	Dwg. No.	2006D02001		Title: 2006 Series Mini Jumper Block 2.54mm	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 2006-2XxxB	
	Projection					
	Unit	mm	Scale			1:1
	Drawn By	Peggy03/13'12				① 740
SHEET		1/1	Ver.No.	A4		