


REV.	SPECIFICATION	ECN NO.	APPD.

Material:
 UL Style: 2651.
 Flammability Rating: UL-VW-1.
Physical:
 Insulation Material: Polyvinyl Chloride.(PVC).
 Conductor: #28AWG(7⁰0.127) Stranded Tinned Copper.
 Color: Grey(RAL7001) With Red Edge.
Electrical Characteristics:
 Voltage Rating: 300V.
 Impedance: 12.2 pF/ft.
 Inductance: 14 μH/ft
 Propagation Delay: 14ns/ft.
 Insulation Resistance: 1GΩ/M min.
 Operating Temperature: -20°C~+105°C.
***RoHS Compliant**

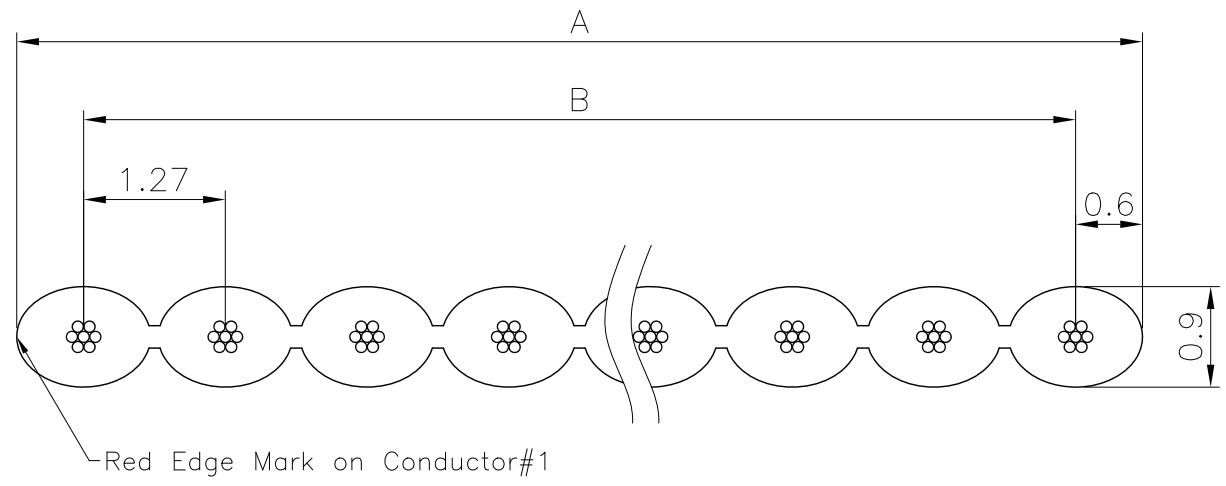

Series — FC- xxP -100
 No. of Conductor — 100Ft

Conductor	9 Thru 64
Dimension	
A	1.27X(No. of Conductor-1)+1.2
B	1.27X(No. of Conductor-1)

Tolerances	Dwg No.	FC00F00001
.x = ±0.30	Projection	\oplus \triangleleft
.xx = ±0.20	Unit	mm
.xxx = ±0.10	Scale	1:1
	Drawn By	Doris 07/03'18

Title:
 Flat Cable
 Pitch 1.27mm
 ①703

OUPIN
 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
 P/N: FC-xxP-100

SHEET	1/1	Ver.No.	A2
-------	-----	---------	----