

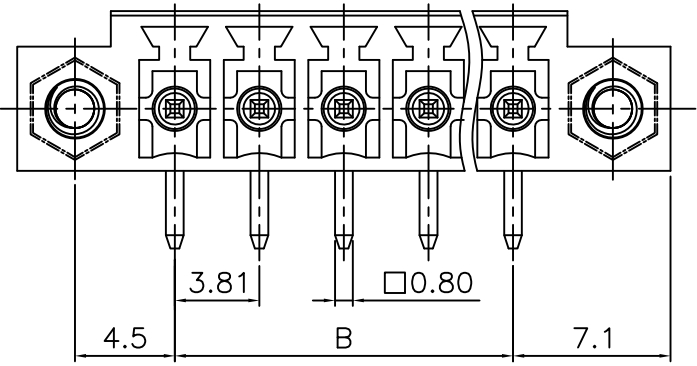
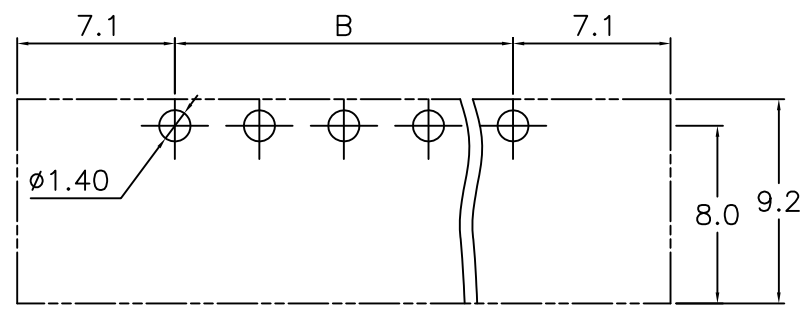



REV.	SPECIFICATION	ECN NO.	APPD.

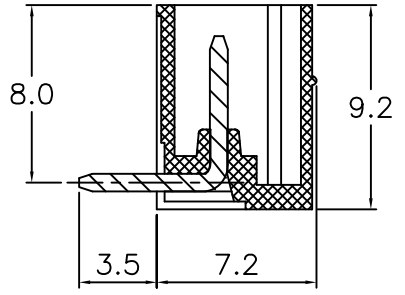

Material:
Housing: Thermoplastic Polyester UL94V-0.
Solder Pin: Copper Alloy, Tin Plated.
Flange NUT: Copper Alloy, M2.5.

Electrical Characteristics:
Voltage Rating: 300V.
Current Rating: 10A.
Withstanding Voltage: 1.6KV.
Operating Temperature: -40°C~+115°C.
***RoHS Compliant**

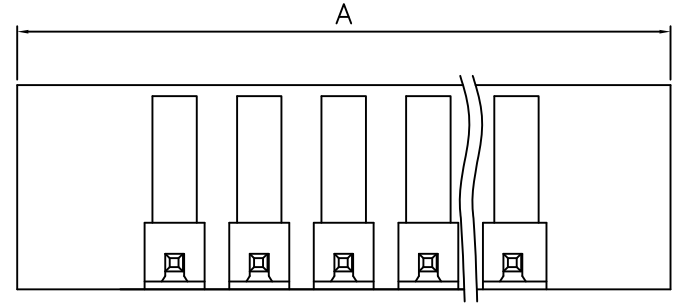

8930- D 072092 G CA xx R B
Series D:Pitch Manufacturing G:Green CA:With No. of R:Right B:Bulk
3.81mm Code B:Black Flange Positions Angle Package
Y:Grey
U:Blue

Position	2 Thru 24
Dimension	
A	(No. of Positions-1)X3.81+14.2
B	(No. of Positions-1)X3.81

Tolerances	Dwg. No.	8930D01024	Title:	
x = ±0.50	Projection		8930 Series	
.x = ±0.30	Unit	mm	3.81mm Terminal Block	
.xx = ±0.15	Scale	1:1		
	Drawn By	Vic Lyu01/06'15		

① 780

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 8930-D072092GCAxxRB			
SHEET	1/1	Ver.No.	X1