


REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: PA66, UL94V-0, (Pale Pinkish Grey).
Contacts: Phosphor Bronze, 60u" Tin Plated.
Wire Range: 28 to 32 AWG, OD: 1.0mm(max)
Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 500V.
Insulator Resistance: 500MΩ min.
Contact Resistance: 30mΩ max.
Operating Temperature: -25°C ~+85°C .
***RoHS Compliant**

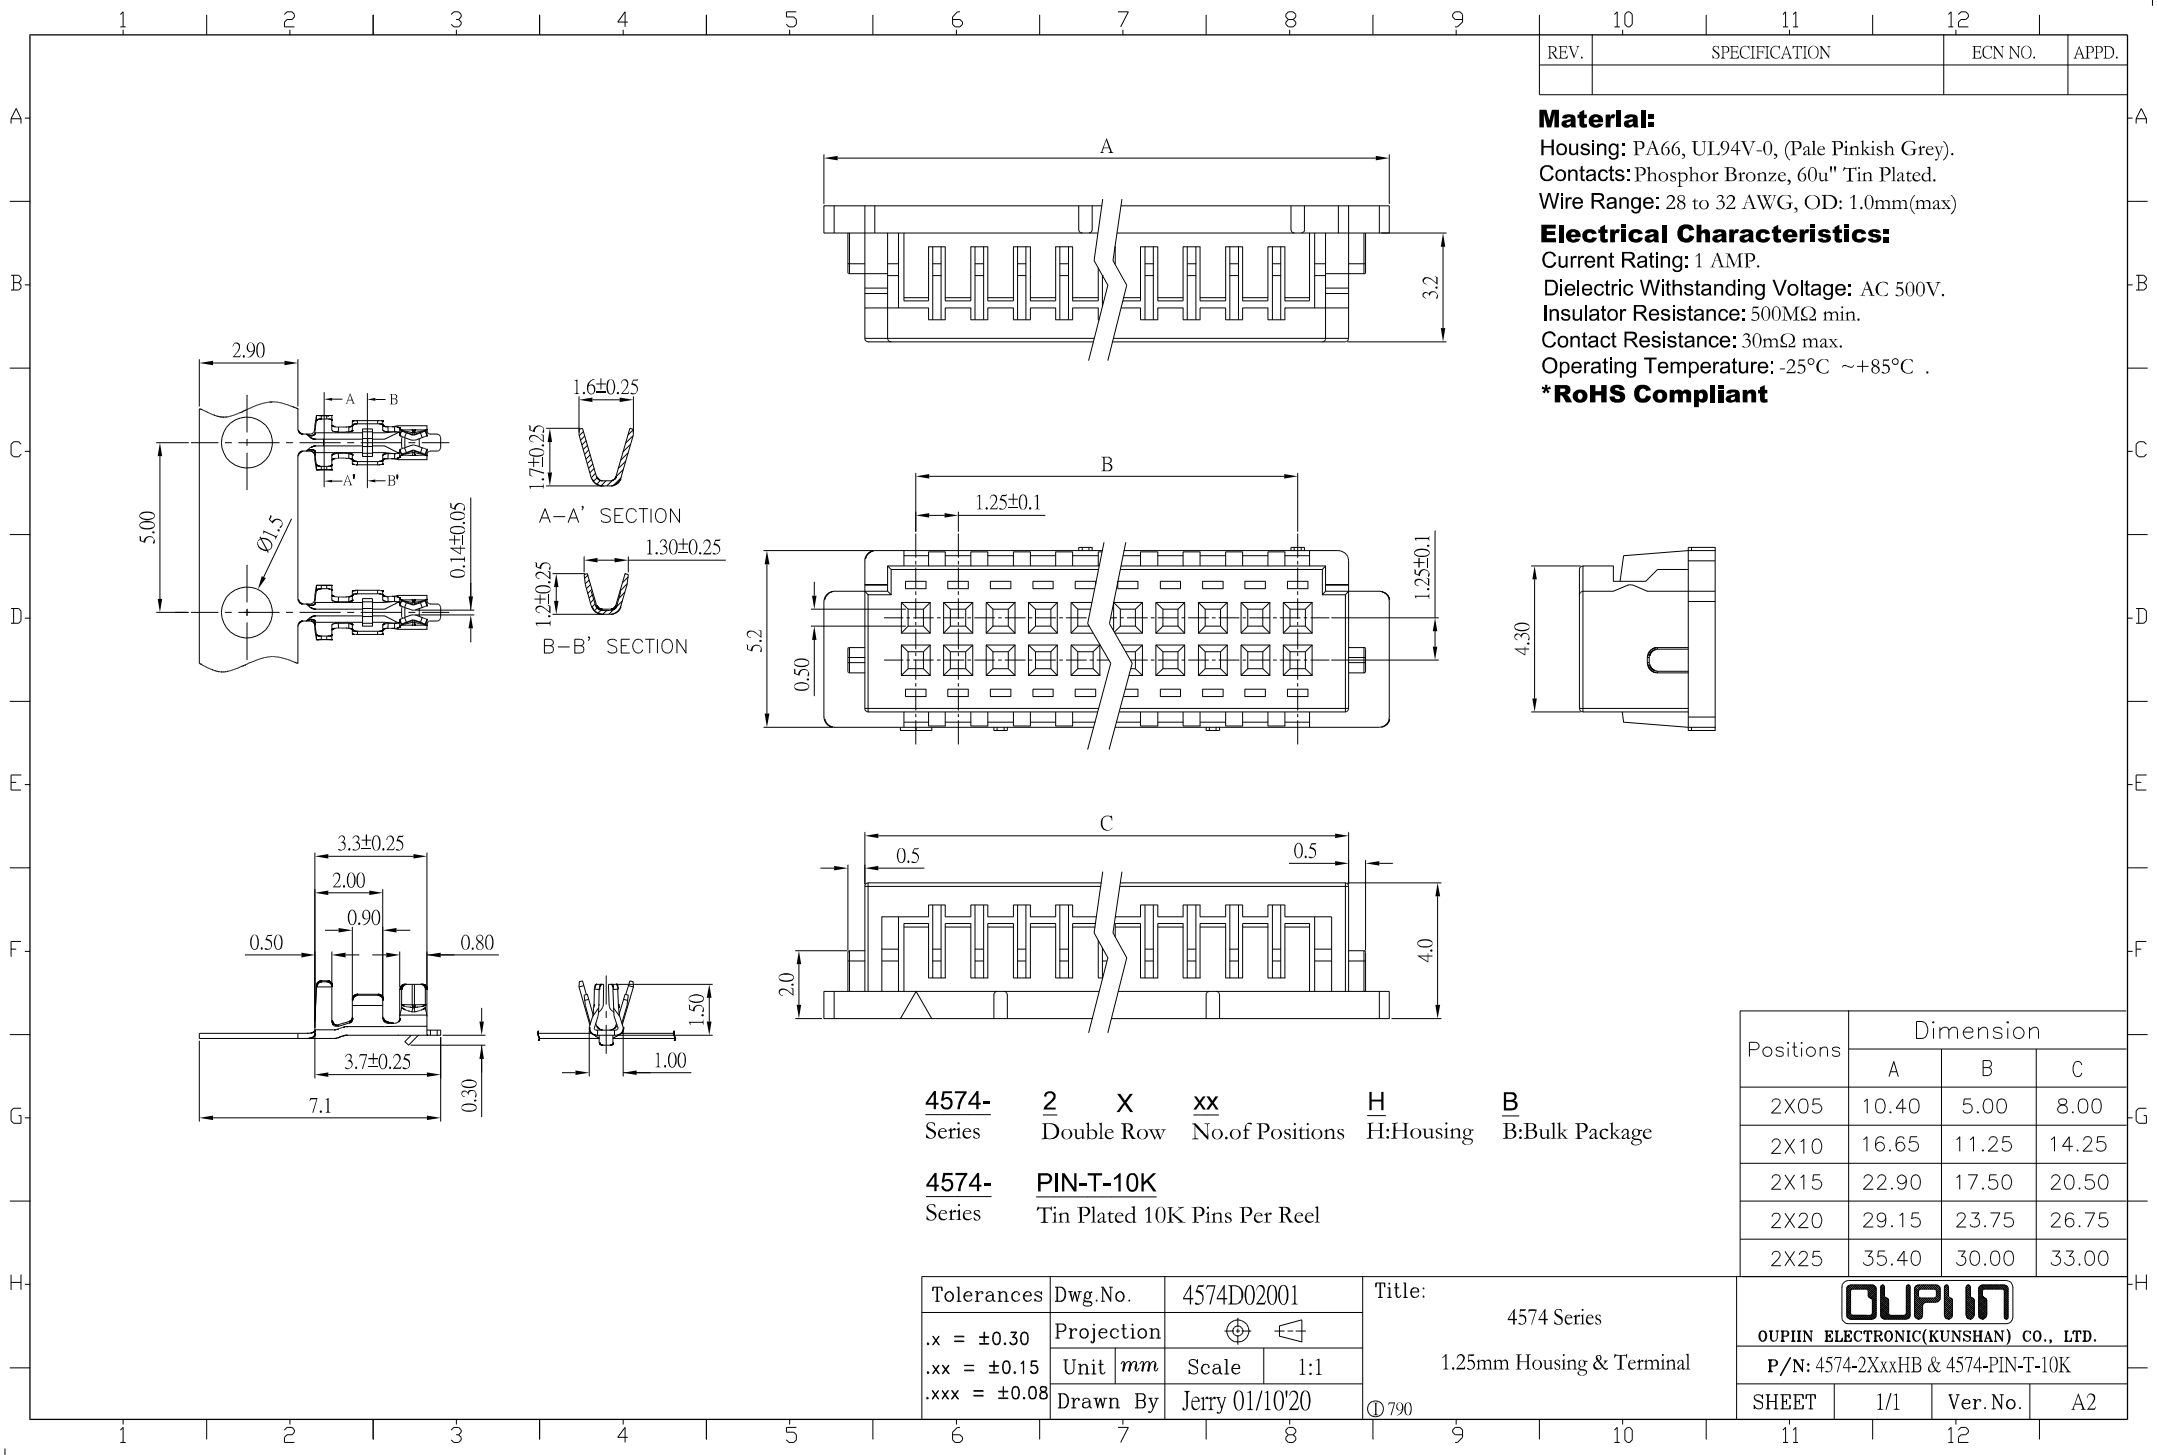

4574- 2 X xx H B
Series Double Row No.of Positions H:Housing B:Bulk Package

4574- PIN-T-10K
Series Tin Plated 10K Pins Per Reel

Positions	Dimension		
	A	B	C
2X05	10.40	5.00	8.00
2X10	16.65	11.25	14.25
2X15	22.90	17.50	20.50
2X20	29.15	23.75	26.75
2X25	35.40	30.00	33.00

Tolerances	Dwg.No.	4574D02001		Title:	
.x = ±0.30	Projection	⊕ ⊖		4574 Series	
.xx = ±0.15	Unit	mm	Scale	1:1	
.xxx = ±0.08	Drawn By	Jerry 01/10'20		1.25mm Housing & Terminal	
			⊕ 790		

OUPIN
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 4574-2XxxHB & 4574-PIN-T-10K

SHEET	1/1	Ver.No.	A2
-------	-----	---------	----