
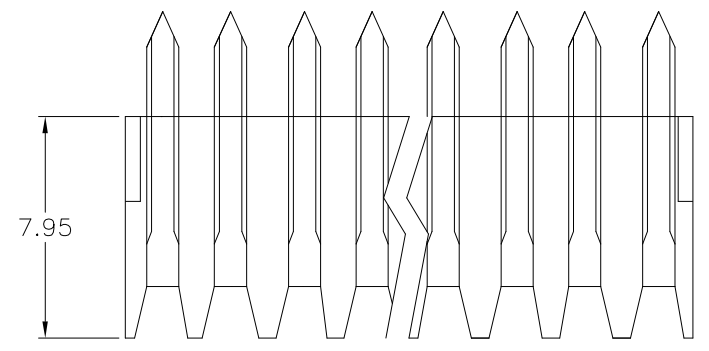
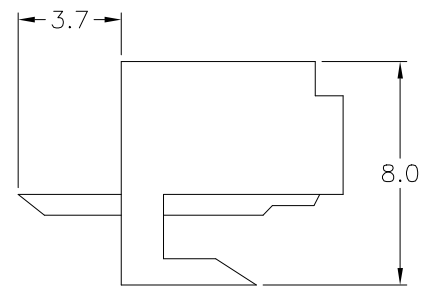



REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: PA66, UL94V-2.
Contacts: Brass, 100u" Tin Plated over Nickel 50u".

Electrical Characteristics:
Voltage Rating: AC 250V max.
Current Rating: 2.5 AMP.
Dielectric Withstanding Voltage: AC 1500V.
Insulation Resistance: 1000MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -40°C~+80°C.
***RoHS Compliant**

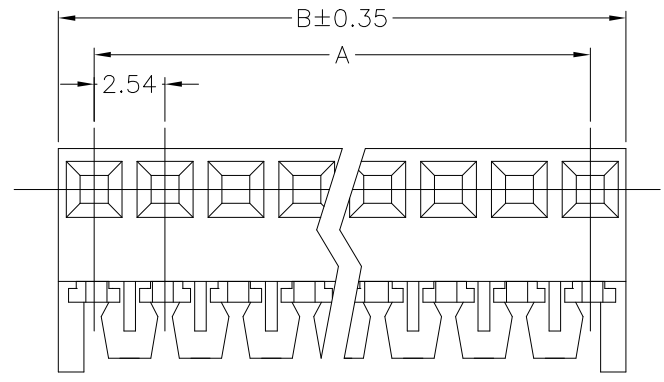

4073- Series **xx** Position **T** Tin Plated **B** Bottom Entry Type **A** Tray Package

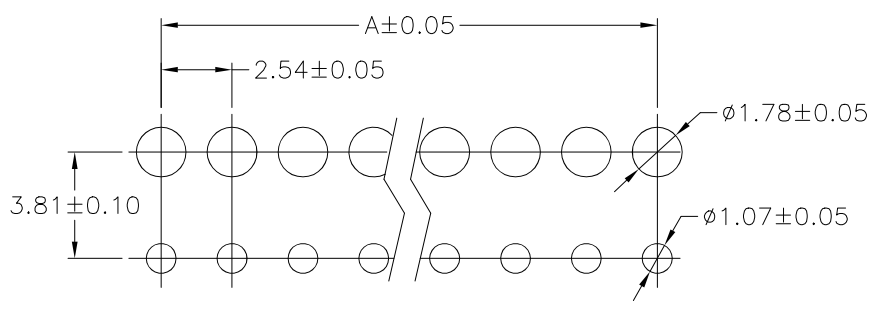

P.C.Board Layout

No. of Contact	Dimension		No. of Contact	Dimension		No. of Contact	Dimension		No. of Contact	Dimension	
	A	B		A	B		A	B		A	B
02	2.54	5.10	09	20.32	22.88	16	38.10	40.66	23	55.88	58.44
03	5.08	7.64	10	22.86	25.42	17	40.64	43.20	24	58.42	60.98
04	7.62	10.18	11	25.40	27.96	18	43.18	45.74	25	60.96	63.52
05	10.16	12.72	12	27.94	30.50	19	45.72	48.28	26	63.50	66.06
06	12.70	15.26	13	30.48	33.04	20	48.26	50.82	27	68.04	70.60
07	15.24	17.80	14	33.02	35.58	21	50.80	53.36	28	68.58	71.14
08	17.78	20.34	15	35.56	38.12	22	53.34	55.90	29	71.12	73.68

Tolerances	Dwg. No.	4073D02003	
.x = ±0.35 .xx = ±0.10	Projection	⊕ ↗	
	Unit	mm	Scale 1:N
	Drawn By	Martin 03/31'22	

Title:
4073 Series
2.54mm PCB CONN.
Bottom Entry

OUPIIN
OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 4073-xxTBA

SHEET	1/1	Ver.No.	A6
-------	-----	---------	----

① 760