

REV.	SPECIFICATION	ECN NO.	APPD.

Material:

Housing: PA66, UL94V-2.

Contact: Brass, 100u" Tin Plated over Nickel 50u"

Electrical Characteristics:

Current Rating: 2.5 AMP.

Voltage Rating: 250V AC Max.





Insulation Resistance: 1000MΩ min.

Contact Resistance: 20mΩ max.

Dielectric Withstanding Voltage: AC 1500V.

Operating Temperature: -40°C~+80°C.

***RoHS Compliant**

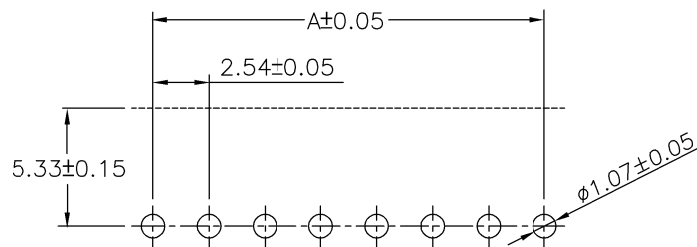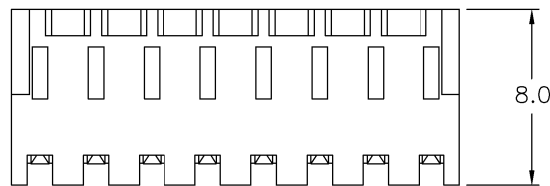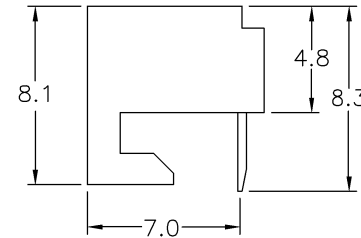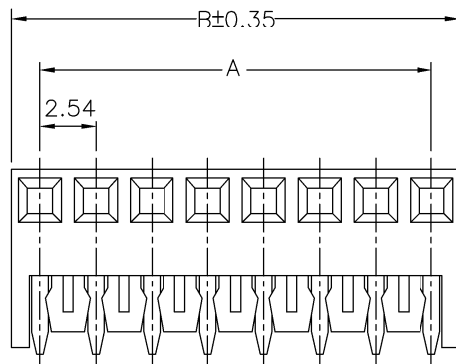


P.C. Board Layout

4073- Series **xx** Position **T** Tin Plated **R** Side Entry Type **A** Tray Package

NO. OF Contact	Dimension		NO. OF Contact	Dimension		NO. OF Contact	Dimension		NO. OF Contact	Dimension	
	A	B		A	B		A	B		A	B
02	2.54	5.10	09	20.32	22.88	16	38.10	40.66	23	55.88	58.44
03	5.08	7.64	10	22.86	25.42	17	40.64	43.20	24	58.42	60.98
04	7.62	10.18	11	25.40	27.96	18	43.18	45.74	25	60.96	63.52
05	10.16	12.72	12	27.94	30.50	19	45.72	48.28	26	63.50	66.06
06	12.70	15.26	13	30.48	33.04	20	48.26	50.82	27	68.04	70.60
07	15.24	17.80	14	33.02	35.58	21	50.80	53.36	28	68.58	71.14
08	17.78	20.34	15	35.56	38.12	22	53.34	55.90	29	71.12	73.68

Tolerances	Drawn No.	4073D02005		Title:	4073 Series			
.x = ±0.35 .xx = ±0.10	Projection	⊕ ⊖		Scale	2.54mm P.C.B Connector			
	Unit	mm	Scale		1:1	SHEET 1/1 Ver.No. A3		
	Drawn By	Martin 03/31'22		①760				

Title:				4073 Series				 OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
				2.54mm P.C.B Connector				P/N: 4073-xxTRA			
				SHEET 1/1				Ver.No. A3			