

REV.	SPECIFICATION	ECN NO.	APPD.

Material:

Housing: Thermoplastic Polyester UL94V-0.

Contacts: Copper Alloy.

Recommend Wire: 28AWG to 32AWG.

Insulation O.D. 1.0mm(MAX)

Electrical Characteristics:

Voltage Rating: AC 125V.

Current Rating: 1 AMP.







Dielectric Withstanding Voltage: AC 250V For 1 minute.

Insulator Resistance: 100MΩ min. at DC 500V.


Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -40C~+85°C.

***RoHS Compliant**

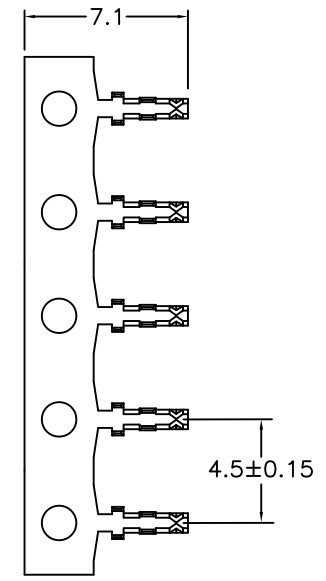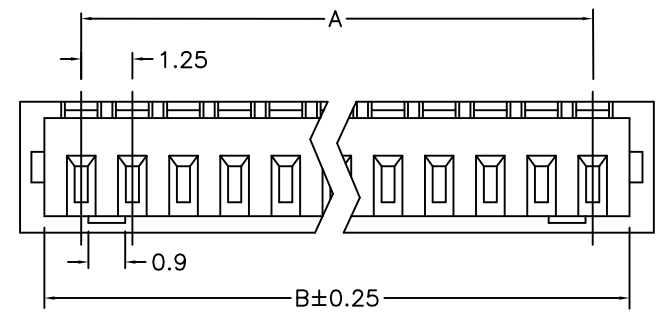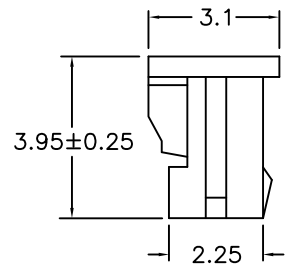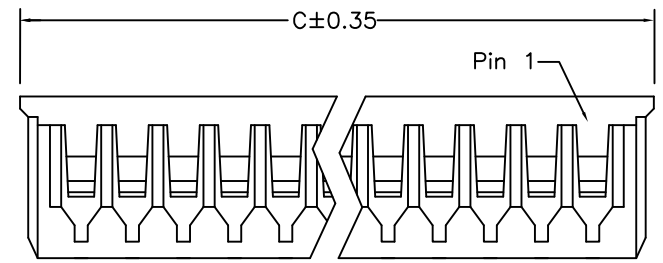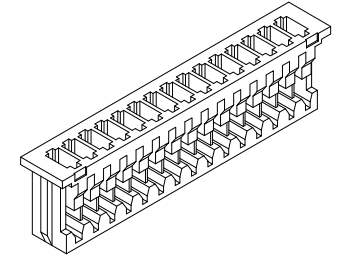

2 Pos



3 Pos

4573- xx H B
 Series No. of Position H: Housing B: Bulk Package
 4573- PIN-T-15K
 Series T: Tin Plated 15K Pins Per Reel

Position	2 Thru 15
Dimension	
A	(No. of Positions X 1.25)-1.25
B	(No. of Positions X 1.25)+0.45
C	(No. of Positions X 1.25)+1.75

Tolerances	Dwg No.	4573D02001	Title:	
x = ±0.5	Projection	\oplus \triangleleft	4573 Series	
.x = ±0.25	Unit	mm	Scale	1:1
.xx = ±0.15	Drawn By	Vic Lyu10/29'15	Housing 1.25mm(0.049")	
			① 704	

OUPIN
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
 P/N: 4573-xxHB&4573-PIN-T-15K
 SHEET 1/1 Ver.No. A7