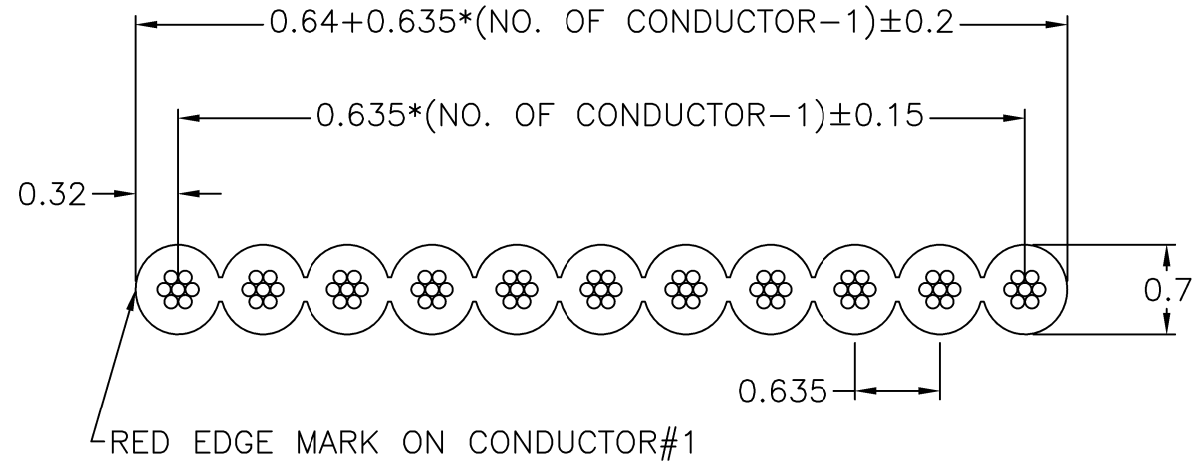




REV.	SPECIFICATION	ECN NO.	APPD.

SPECIFICATIONS :
 UL Style: 2678.
 Operating Temperature: -20°C to +105°C.
 Flammability Rating: UL-VW-1.
 Voltage Rating: 150V.
Physical :
 Insulation Material: Polyvinyl Chloride.(PVC).
 Conductor: #30AWG(7*0.102) Stranded Tinned Copper.
 Color: Grey With Red Edge.
Electrical :
 Impedance: 75 Ω(Unbalanced).
 Capacitance: 22.5 pF/ft
 Inductance: 317 uH/ft
 Propagation Delay: 1.7ns/ft.
 Insulation Resistance: 1GΩ/M min.
***RoHS Compliant**



FC4- xxP -100
 Series No. of Conductor 100Ft

Tolerances .x = ±0.30 .xx = ±0.20 .xxx = ±0.10	Dwg No.	FC4XF00001	Title:		 OUPIN ELECTRONIC(KUNSHAN) CO., LTD.				
	Projection		FC4 Series			P/N: FC4-xxP-100			
	Unit	mm	Scale	1:N T.S.	0.635mm Pitch Flat Cable				
	Drawn By	Jerry	02/26'20			<table border="1"> <tr> <td>SHEET</td> <td>1/1</td> <td>Ver.No.</td> <td>A2</td> </tr> </table>	SHEET	1/1	Ver.No.
SHEET	1/1	Ver.No.	A2						