








REV.	SPECIFICATION	ECN NO.	APPD.



**Material:**  
Housing: PBT, UL94V-0.  
Shell: Steel.  
Recommend Wire: 24AWG to 28AWG.  
**Electrical Characteristics:**  
Current Rating: 1 AMP.  
Dielectric Withstanding Voltage: AC 1000V for 1 minute.  
Insulation Resistance: 1000MΩ min. at DC 500V.  
Contact Resistance: 20mΩ max. at DC 100mA.  
Operating Temperature: -55°C~+105°C.  
**\*RoHS Compliant**

**Male**

**Female**

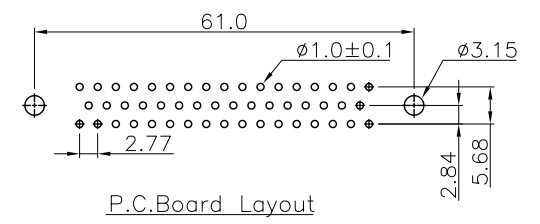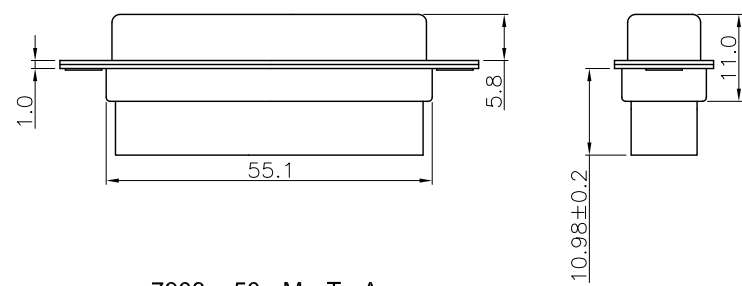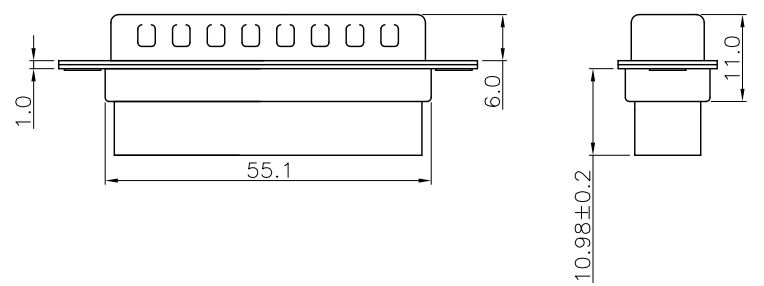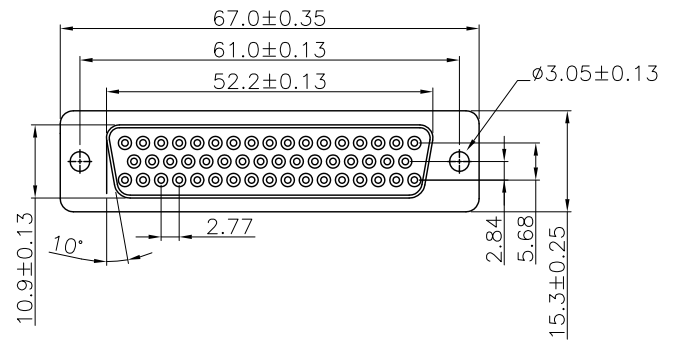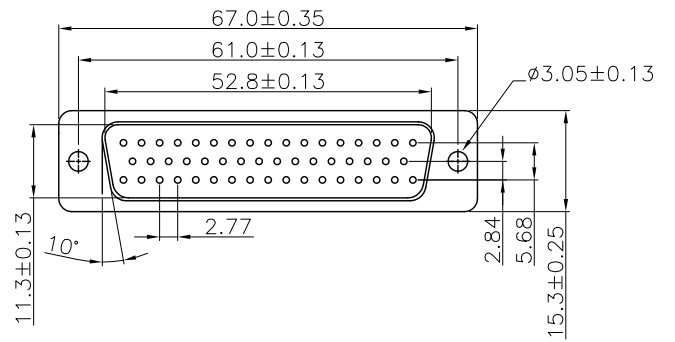

**7908- 50 M T A**  
Series ——— Position ——— A: Tray Package  
M: Male  
F: Female

<b>Tolerances</b>	<b>Dwg. No.</b>	7908D03002		<b>Title:</b>		<b>OUPIN</b> OUPIN ELECTRONIC(KUNSHAN) CO., LTD.	
x = ±0.50	<b>Projection</b>	⊕ ⊖		7908 Series D-SUB Crimp Type			
.x = ±0.25	<b>Unit</b>	mm	<b>Scale</b>			① 767	
.xx = ±0.15	<b>Drawn By</b>	bo-min 1/28'19		<b>Ver.No.</b>	A4		