
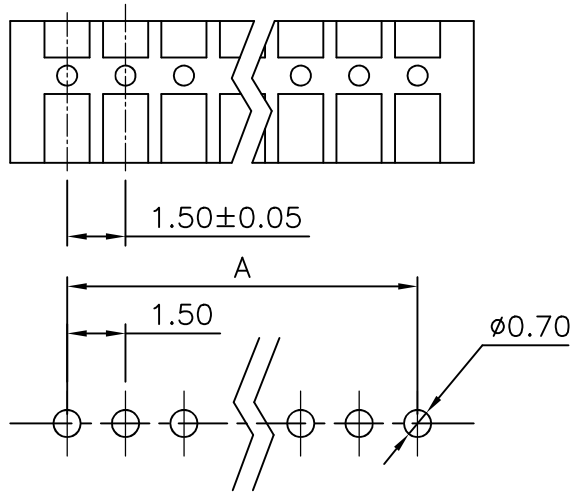
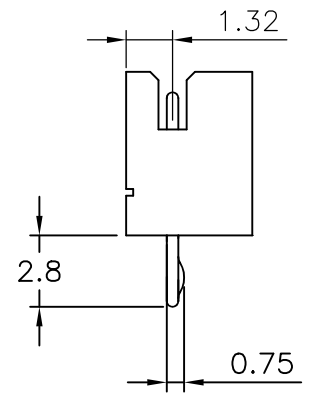
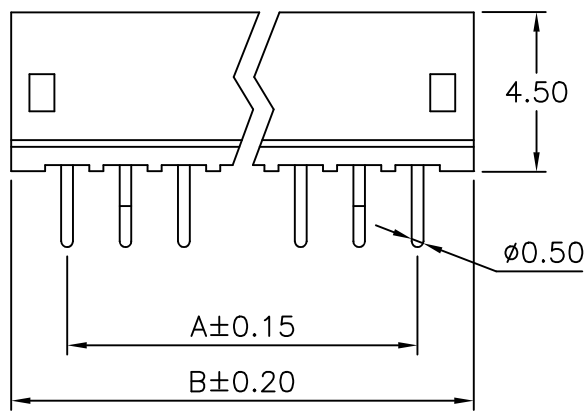


REV.	SPECIFICATION	ECN NO.	APPD.

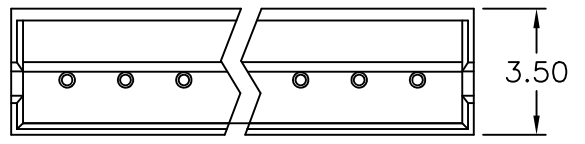

P.C. Board Layout

**Material:**

Housing: PA66, UL94V-0, Natural.  
 Contacts: Brass, 130u" Tin Plated over Nickel 50u".

**Electrical Characteristics:**

Current Rating: 1AMP.  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 500MΩ Min.  
 Dielectric Withstanding Voltage: AC 500V.  
 Operating Temperature: -25°C ~ +85°C.

**\*RoHS Compliant**

4572- xx T S B  
 Series No. of Position T: Tin Plated S: Straight B: Bulk Package

Position	02 Thru 13
Dimension	
A	(1.5XNo. of Positions)-1.5
B	(1.5XNo. of Positions)+1.5

Tolerances	Dwg. No.	4572D01001		Title:		4572 Series	
.x = ±0.35	Projection	⊕ ↗		1.5mm Wire to Board		OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.	
.xx = ±0.25	Unit	mm	Scale	1:1	P/N: 4572-xxTSB		
.xxx = ±0.15	Drawn By	Jerry 11/11'19		⊙ 704	SHEET		1/1
					Ver.No.		A6