



REV.	SPECIFICATION	ECN NO.	APPD.

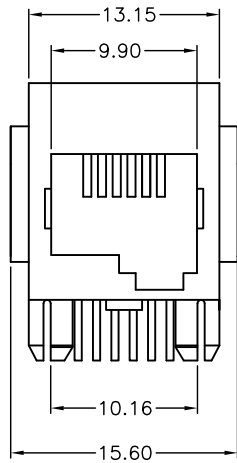

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Phosphor Bronze. Gold Plated on Contact Area and 100μ" Tin Plated on Solder Tail over 40~80μ" Nickel.

Electrical Characteristics:




Current Rating: 1.5 AMP.

Insulation Resistance: 1000MΩ min. at DC 500V.


Contact Resistance: 30m Ωmax. at DC 100mA.

Operating Temperature: -40°C~+80°C.

***RoHS Compliant**

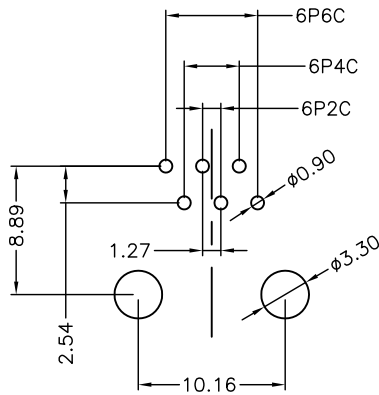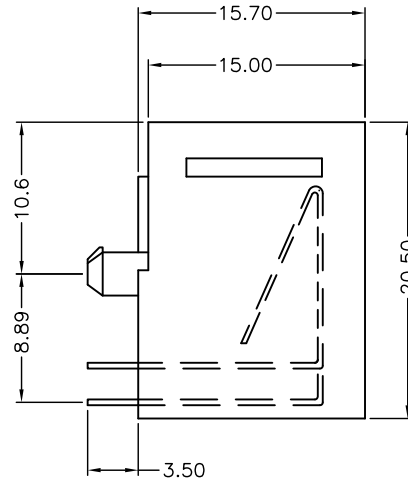

P.C.Board Layout

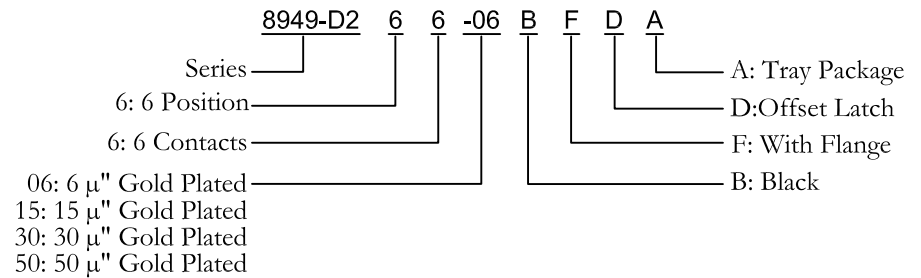

Tolerances	Dwg No.	8949D02128		Title:	
.x = ±0.50	Projection	⊕ ⊖		8949-D2 Series Modular Jack	
.xx = ±0.25	Unit	mm	Scale		1:1
.xxx = ±0.15	Drawn By	Vivian 06/26'17			

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 8949-D266-06BFDA			
SHEET	1/1	Ver.No.	A2