
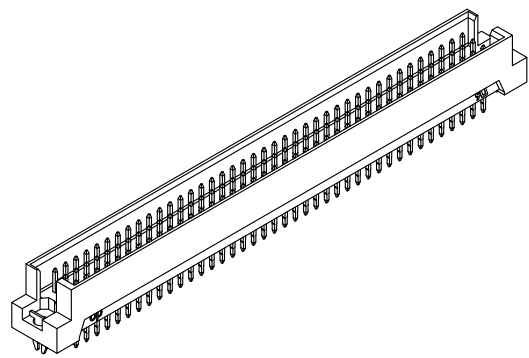


REV.	SPECIFICATION	ECN NO.	APPD.
R2		ECR140830	

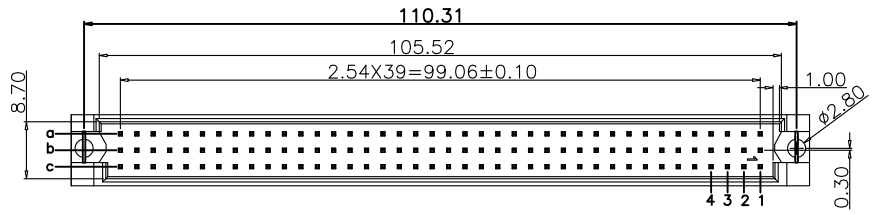




Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
 Contacts: Copper Alloy.
 Lock: Copper Alloy

Electrical Characteristics:

Current Rating: 2 AMP.
 Dielectric Withstanding Voltage: AC 1000V For 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 20mΩ max. at DC 100mA.
 Operating Temperature: -55°C ~ +125°C .

***RoHS Compliant**

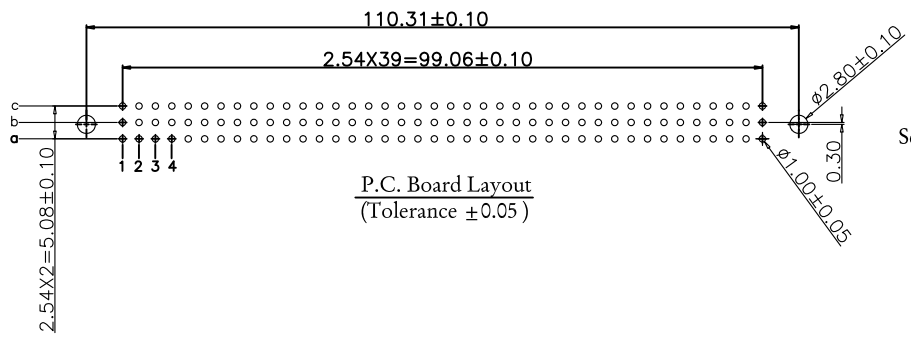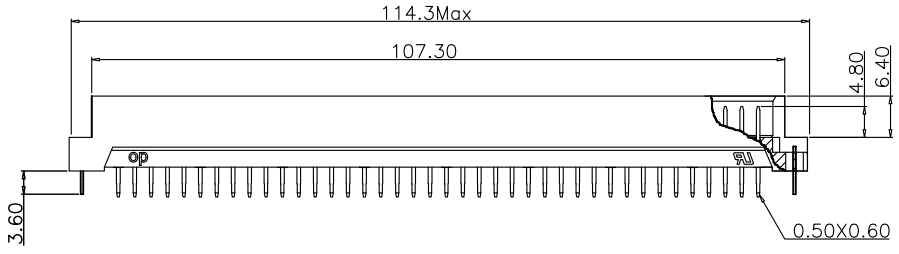

Series 9001- 1 3 xx x C xx L1 A
 1: 2.54mm
 3: Male
 Position
 1: Dip Length
 2: Dip Length
 W1: Dip Length
 W2: Dip Length
 C: Dip Tin
 Contact Gold
 G: Gold Plated
 A: Tray Package
 Blank: W/O Lock
 L1: With Lock
 00: G/F
 10: 10 μ"
 15: 15 μ"
 30: 30 μ"

Pitch	Length	1	2	W1	W2
	X	4.0	2.5	13	17
2.54mm	Position	Rows with Contacts	Contact Arrange		
	120	a b c			
	80	a - c			
40	a - -				

Tolerances	Dwg No.	9001D13003
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	T T 08/22'14

Title: 9001 Series
 DIN41612 R Type Male

OUPIN
 OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
 P/N: 9001-13xxxCxxL1A
 SHEET 1/1 Ver.No. R2