
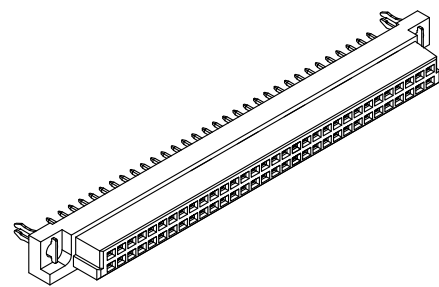


REV.	SPECIFICATION	ECN NO.	APPD.
R1		ECN120705	

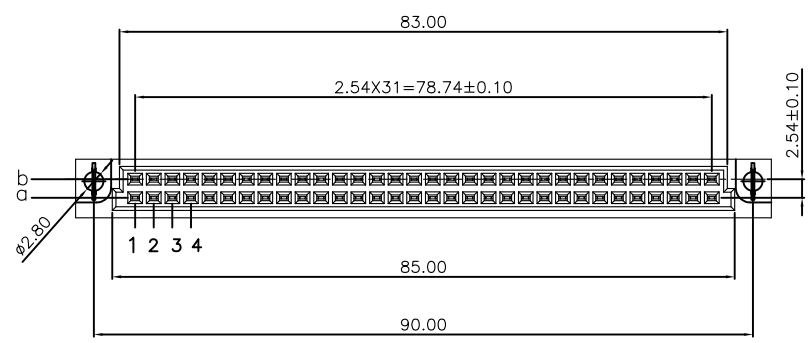




Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
 Contacts: Copper Alloy.
 Lock: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 AMP.
 Dielectric Withstanding Voltage: AC 1000V For 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 20mΩ max. at DC 100mA.
 Operating Temperature: -55°C ~ +125°C .

***RoHS Compliant**

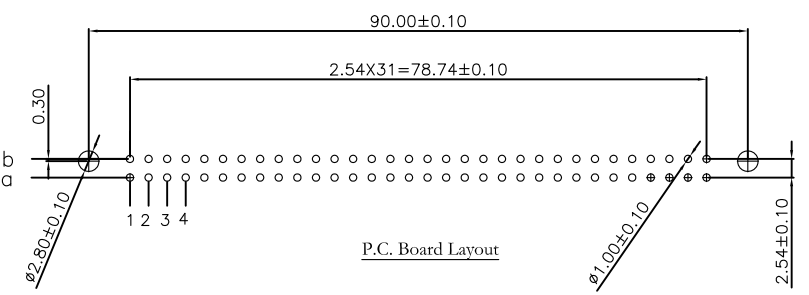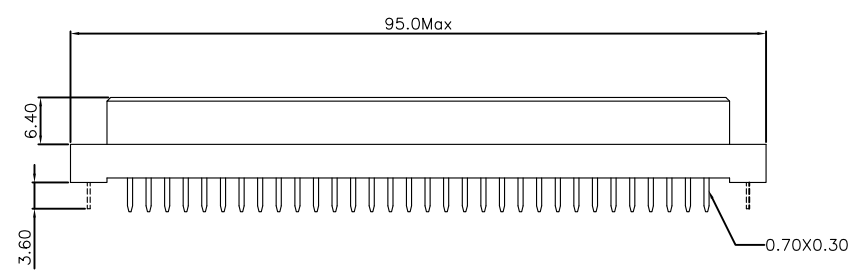

9001-C 3 2 xx x C xx (L1) A
 Series
 3: 2.54mm
 4: 5.08mm
 2: Female
 Position
 1: Dip Length
 2: Dip Length
 A: Tray Package
 L1: With Lock
 Blank: W/O Lock
 00: G/F
 10: 10 μm
 15: 15 μm
 30: 30 μm
 C: Selective Gold Plated

	Pitch	Position	Rows With Contacts		Contact Arrange	P/N
			1	2		
2.54mm	64	a b	4.0	2.5		9001-C3264xC
	32	a -				9001-C3232xC
5.08mm	32	a b				9001-C4232xC
	16	a -				9001-C4216xC

Tolerances	Dwg. No.	9001-D0000-005	Title:		 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9001-C3(4)2xxx Cxx(L1)A	
x = ±0.5	Projection		9001-C Series DIN41612			
.x = ±0.25	Unit	mm				Scale
.xx = ±0.15	Drawn By	FL 07/31'12	SHEET	1/1		Ver.No.