



9113-G22AB7PPA

REV.	SPECIFICATION	ECN NO.	APPD.
R2		ECN180217	

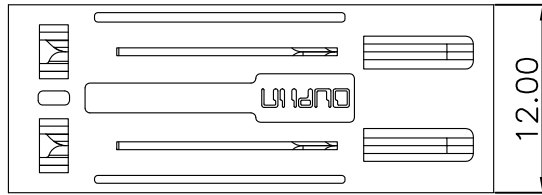




Material and Plating:

Housing: LCP, UL94V-0, BLACK.
 Power Contacts: High Conductivity Copper.
 30u" Au+Pd/Ni on Contact Area and 80u" Min Tin Plated on Solder Tail over nickel 50u" Min.

Electrical Characteristics:

Current Rating: Power: 35 AMP (2oz*2); 45 AMP (2oz*4)
 Dielectric Withstanding Voltage: Power: AC 1500V For 1 minute.
 Insulator Resistance: Power: 1500MΩ min. at DC 500V.
 Contact Resistance: Power: 0.5mΩ max.
 Operating Temperature: -55°C ~ +125°C.



***RoHS Compliant**

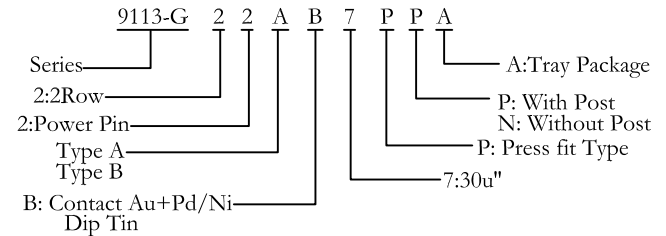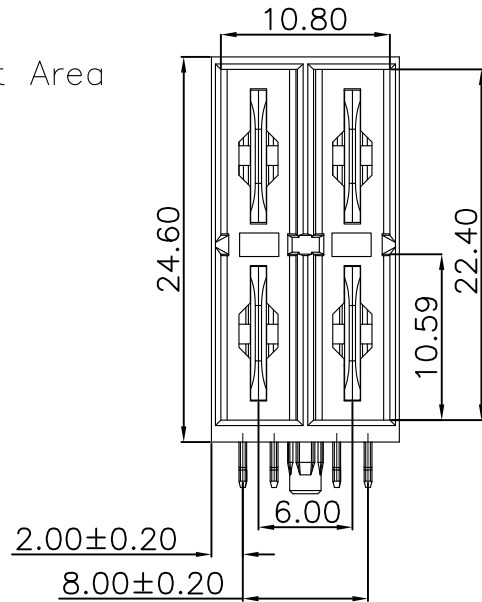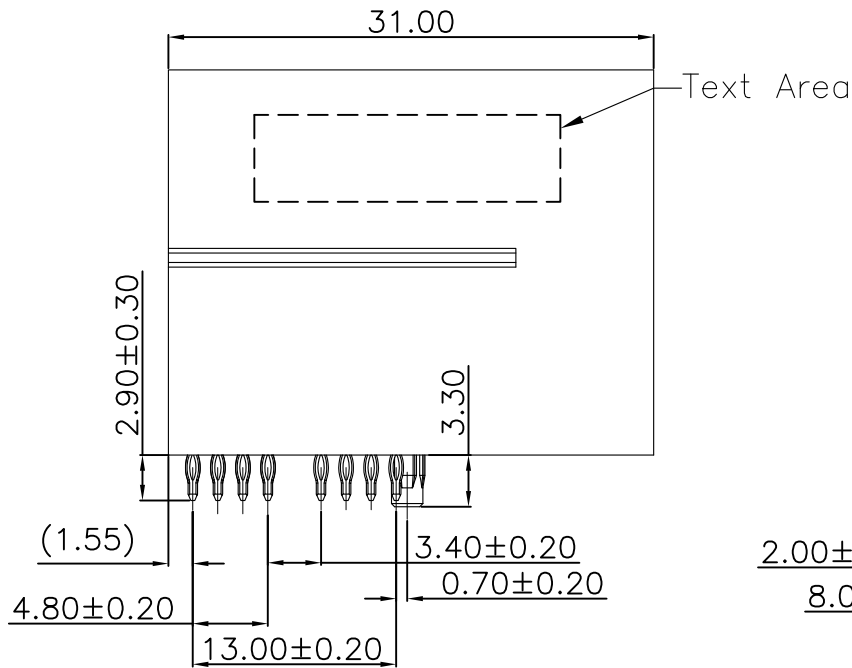



Tolerances	Dwg.No.	9113-D0000-026		Title:
X=±0.50	Projection			9113 Series
.X=±0.25	Unit	mm	Scale	1:1
.XX=±0.15	Drawn By	MXM 02/09'18		Male power connector

OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9113-G22AB7PPA			
SHEET	1/2	Ver.No.	R2

REV.	SPECIFICATION	ECN NO.	APPD.
R2		ECN180217	

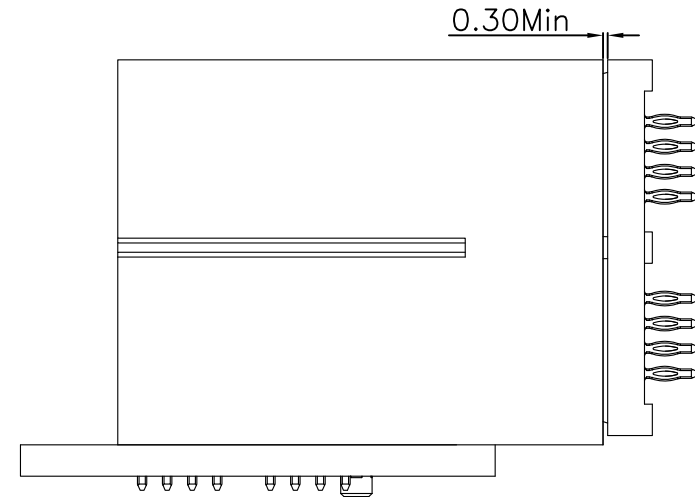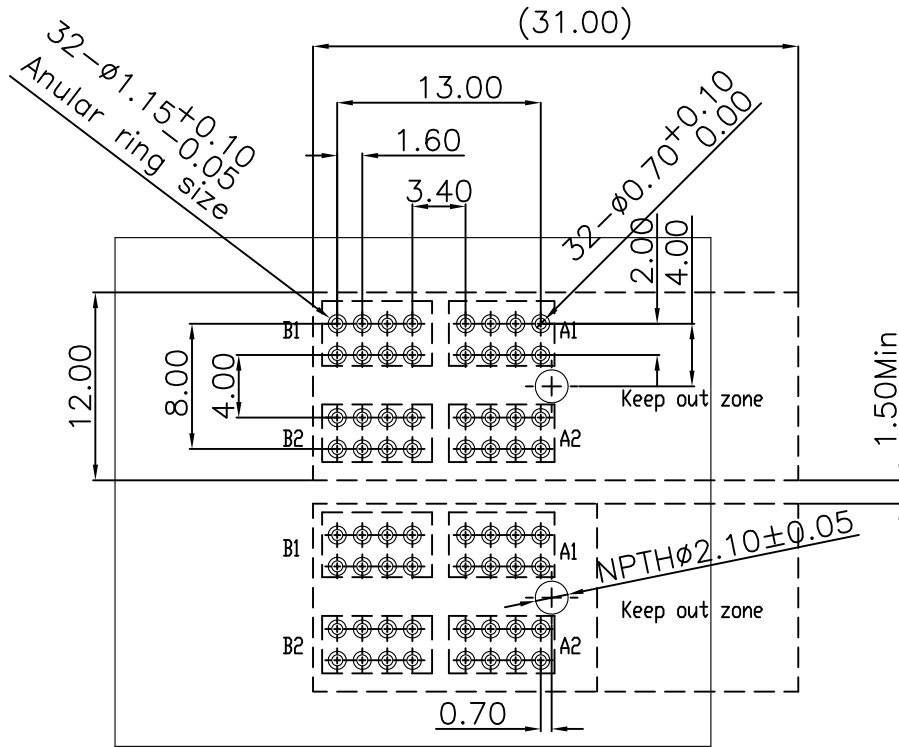

Tolerances	Dwg.No.	9113-D0000-026	Title:	9113 Series	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
X= ±0.50	Projection		Male power connector	P/N: 9113-G22AB7PPA	
.X= ±0.25	Unit	mm	Scale	1:1	SHEET 2/2
.XX= ±0.15	Drawn By	MXM 02/09'18			Ver.No. R2