



PRODUCT SPECIFICATION

(產品規格書)

Ordering information

8949-P	10	8	/06	B	A
Series	POS	8:8 Contacts	06:06 μ”	B:Black	A:Tray
		6:6 Contacts	15:15 μ”		Package
		4:4 Contacts	30:30 μ”		
		2:2 Contacts	50:50 μ”		

PRODUCT NAME (產品名稱)	DOCUMENT No.: (文件編號)	Rev. (版本)	OUPIIN
Modular Jack (RoHS)	8949spec-P	A2	(歐品)
	Approved (核準)	Checked (審核)	Prepared (製作)
	Q.A. Section Chief	Amy Chiu	APR.13/2011



PRODUCT SPECIFICATION OF OUPIIN

1. SCOPE (範圍)	3
2. REFERENCE DOCUMENTS (參考文件)	3
3. FEATURE & DIMENSIONS (特徵及尺寸)	3
3.1. <i>PRODUCT DIMENSION (產品尺寸)</i>	3
3.2. <i>PCB/PANEL LAYOUT (印刷電路板佈局)</i>	3
3.3. <i>BILL OF MATERIAL (材料清單)</i>	3
3.4. <i>MECHANICAL & ELECTRICAL CHARACTERISTIC (機械及電器特性)</i>	3
3.5. <i>PACKAGING (包裝)</i>	3
3.6. <i>RATING CURRENT AND RATING VOLTAGE (額定電流與額定電壓)</i>	4
3.7. <i>STORAGE AND OPERATING TEMPERATURE (儲存使用溫度)</i>	4
4. Environmental (環境要求)	4
4.1. <i>SOLDERABILITY (可焊性)</i>	4
4.2. <i>RESISTANCE TO SOLDER HEAT (耐焊接熱)</i>	4
INFRARED REFLOW (紅外線回流焊接)	4
1 Preheat (預熱)	4
2 Soldering (焊接)	4
3 Cool Down (冷卻)	4
5. PERFORMANCE AND TEST DESCRIPTION (性能及測試)	5
5.1. <i>REQUIREMENT (要求)</i>	5
5.2. <i>TEST CONDITION (測試條件)</i>	5
5.3. <i>SAMPLE SELECTION (樣品選擇)</i>	5
Table I: Test Requirements and Procedure	6-7
(附錄一: 測試要求)	
Table II: Reflow soldering profile	8
(附錄二: 回流焊接曲線圖)	
Table III: Material	9-11
(附錄三: 材料證明)	



PRODUCT SPECIFICATION OF OUPIIN

1. SCOPE (範圍)

This product specification defines the product performance and the test methods to ascertain the performance of the Modular Jack , which is designed and manufactured by Oupiin Electronic Co.,Ltd.

(本產品規格書規定了由歐品電子有限公司生產的 Modular Jack 型連接器,產品的特性及測試方法.)

2. REFERENCE DOCUMENTS (參考文件)

MIL-STD-1344A	Test method for electrical connector (電子連接器測試方法)
MIL-STD-202F	Test method for electrical components (電子零件測試方法)
EIA 364	Test method for electrical components (電子零件測試方法)

3. FEATURE & DIMENSIONS (特徵及尺寸)

3.1. PRODUCT DIMENSION (產品尺寸)

These connectors shall have the dimensions as shown in drawing.

(本產品的相關尺寸參考圖面.)

3.2. PCB/PANEL LAYOUT (印刷電路板佈局)

The recommended PCB layout is shown in drawing.

(本產品適用的 PCB layout 參考圖面.)

3.3. BILL OF MATERIAL (材料清單)

Harmful material control follow the requirement of RoHS. The bill of material and product number is described in drawing.

(有害物質控制符合RoHS指令要求.本產品使用的材料參考附件.)

3.4. MECHANICAL & ELECTRICAL CHARACTERISTIC (機械及電氣特性)

The connector shall have the mechanical and electrical performance as described in drawing.

(本產品的機械及電氣特性見圖面：)

3.5. PACKAGING (包裝)

Products shall be packaged according to requirements specified in purchase order for safe delivery.

Products required carrier tape should meet the proper specification per purchase order. Connector container and the packaging specification is shown in package drawing.



PRODUCT SPECIFICATION OF OUPIIN

(產品包裝可依客戶指定要求.本產品採用 Tray Packag 包裝，具體見包裝圖面.)

3.6 RATING CURRENT AND RATING VOLTAGE 額定電流與額定電壓

Rating current is 1.5 A, rating voltage is 150V DC/AC RMS.

額定電流 1.5 A，額定電壓 150V DC/AC RMS。

3.7 STORAGE AND OPERATING TEMPERATURE 儲存與使用溫度

Temperature range: -40°C~+85°C, including terminal temperature rise for rating current.

溫度範圍：-40°C~+85°C，包含接觸端子的額定電流溫升。

4. ENVIRONMENTAL (環境要求)

4.1. SOLDERABILITY (可焊性)

Connectors meet solder ability to MIL-STD-202F. Finish shall be free of contaminants.

(產品可焊性符合 MIL-STD-202F 標準規定的相關要求，表面不得有污染物.)

4.2. RESISTANCE TO SOLDER HEAT (耐焊接熱)

INFRARED REFLOW (紅外線回流焊接)

Three cycles. Each cycle consisting of three consecutive phased.

(三個週期，每個週期包括三個連續的階段完成；)

1 Preheat (預熱)

Increase in temperature not to exceed 4°C per second.

(溫度增加不超過 4°C /秒.)

2 Soldering (焊接)

Maximum allowable time above reflow temperature of 150~200°C is 90~120 seconds. Maximum temperature in this interval is 260°C, not to exceed 5 seconds.

(回流焊溫度150~200°C時最長不超過90~120秒. 最高溫度260°C時間不超過5秒.)

3 Cool Down (冷卻)

Cool down shall not exceed 5°C per second.

(冷卻速度不超過5°C/秒.)

Note: (說明)

Device temperature measurements are referenced from the top-center of the package outer surface.

(設備溫度量測時以從頂部中間位置測量為準.)



PRODUCT SPECIFICATION OF OUPIIN

5. PERFORMANCE AND TEST DESCRIPTION

(性能及測試)

5.1. REQUIREMENT (要求)

Product is designed to meet electrical, mechanical, and environmental performance requirements specified in **Table I**.

(本產品設計符合附表一所述的機械，電氣及環境要求。)

5.2. TEST CONDITION (測試條件)

Unless otherwise specified, all tests shall be performed at ambient environmental conditions.

(除非特別注明，所有測試在室溫條件下完成；)

5.3. SAMPLE SELECTION (樣品選擇)

Test samples shall be selected at random from current production. No test samples shall be reused. Samples are pre-conditioned with 10cycles of durability. Each group shall be containing 5 test samples.

(測試樣品從現生產的產品中隨機抽取，所有測試過的樣品不得重複使用。樣品已預先插拔10次，每組測試有5個樣品；)

PRODUCT SPECIFICATION OF OUPIIN

Table I: Test Requirements and Procedures

(附錄一:測試要求)

Items (項目)	Requirements (要求)	Test Methods (檢測方法)
1. Confirmation of Product (產品確認)	Product shall be conforming to the requirements of applicable product drawing. (產品必須滿足相關檔的規定)	Check the dimensions and functions per applicable product drawing in your eyes. (目視，尺寸及功能依產品圖面檢查)
2. Contact Resistance (接觸阻抗)	30 mΩ Max. initial (最大.初態)	Subject mated contacts assembled in housing to closed circuit of 100 mA max. at open circuit voltage of 20 mV max. (所述固定在外殼裏的端子連結到一個封閉回路中測試：電流 100 mA，電壓 20 mV max.)
3. Insulation Resistance (絕緣阻抗)	500 MΩ Min. (最小)	Measure by applying test potential between the adjacent contacts, and between the contacts and ground in the mated connector. MIL-STD-202, Method 302, Condition B (100 V DC±10%). (測試產品端子間以及端子與接地間的電阻，適用：MIL-STD-202,方法 302，條件 B)(100V DC±10%)
4. Durability (Repeated Mating/Unmated) (耐久性)	Contact Resistance: 50 mΩ Max. after testing. (測試後接觸阻抗最大 50mΩ)	The sample should be mounted the tester and fully mated and unmated 750 cycles specified at the rate of 25mm/min (重復進行配合產品 750 次插拔.)
5. Mating Force (產品插拔力)	Mated force : 2 contact : 1.6 kgf max. 4 contact : 1.8 kgf max. 6 contact : 2.1 kgf max. 8 contact : 2.3 kgf max. 10 contact : 2.5 kgf max. 插入力: kg 最大	Measure force necessary to unmated between the counterparts connectors.. (軸向力以 25±3mm/分的速度從塑膠本體對插後拔出)
6. Thermal shock (熱衝擊)	After testing, no damage, Contact Resistance 50 mΩ max.. Dielectric Strength should be OK, Insulation Resistance should be 200 MΩ min. (測試後,產品無損壞，接觸阻抗：50 m	Temperature range from -40°C to +65°C .Start from -40°C, after 30 min. change to +65°C; change time is no more than 30 seconds. Total 5 cycles. MIL-STD-202, Method 107D, condition A. (溫度變化範圍： -40°C~ +65°C；從 -40°C 開始，



PRODUCT SPECIFICATION OF OUPIIN


	Ω最大；耐電壓測試 OK, 絕緣阻抗 200MΩ 最小;)	30 分鐘後換到+65°C；轉換時間不超過 30 秒；共 5 個循環.適用：MIL-STD-202，方法 107D，條件 A.)
7. Humidity (恆溫恆濕)	After testing, no damage, Contact Resistance 50 mΩ max.. Dielectric Strength should be OK, Insulation Resistance should be 200 MΩ min. (測試後,產品無損壞，接觸阻抗：50 mΩ 最大；耐電壓測試 OK, 絕緣阻抗 200MΩ 最小;)	Temperature :65±2° C 96 hours. (溫度：65±2° C 96 小時) Relative Humidity : 90-95%; (相對濕度：90-95%；) Duration :96 Hours. MIL-STD-202, Method 108, (時間：96 小時；MIL-STD-202，方法 108。)
8. Solder ability (可焊性)	Appearance of the specimen shall be inspected after the test with the assistance of a magnifier capable of giving a magnification of 10 X for any damage such as pinholes, void or rough surface. (樣品在測試完成後，在放大倍數為 10 倍的顯微鏡下，檢查外觀損壞如：小孔，空焊，外觀粗糙度；)	Soldering time: 3 to 5 Seconds (焊接時間：3~5 秒) Soldering Temperature: 240±5°C. (焊接溫度：240±5°C.)
9. Resistance to soldering heat 耐焊接熱	No damage 產品無損壞	Leave subject product in the 250±5°C chamber for 5 Seconds 產品置於 250±5°C 烘箱內 5 秒。

Table II: Reflow soldering profile

(附錄二:回流焊接曲線圖)

Pb-free reflow profile requirements: (無鉛回流焊接曲線)

Parameter (參數)	Reference (參考)	Specification (規格)
Average Temperature Gradient in Preheating (平均預熱溫度)		2.5°C/s
Soak Time 25~150°C	T_{soak}	60 Seconds (max)
Time Above 150~200°C	t_1	120 Seconds (max)
Time Above 200~230°C	t_2	50 Seconds (max)
Time Above 230~250°C	t_3	5 Seconds (max)
Peak temperature in reflow (回流焊接中最高溫度)	T_{peak}	250°C (-0/+5°C)
Temperature Gradient in Cooling (冷卻時溫度幅度)		Max -5°C/s

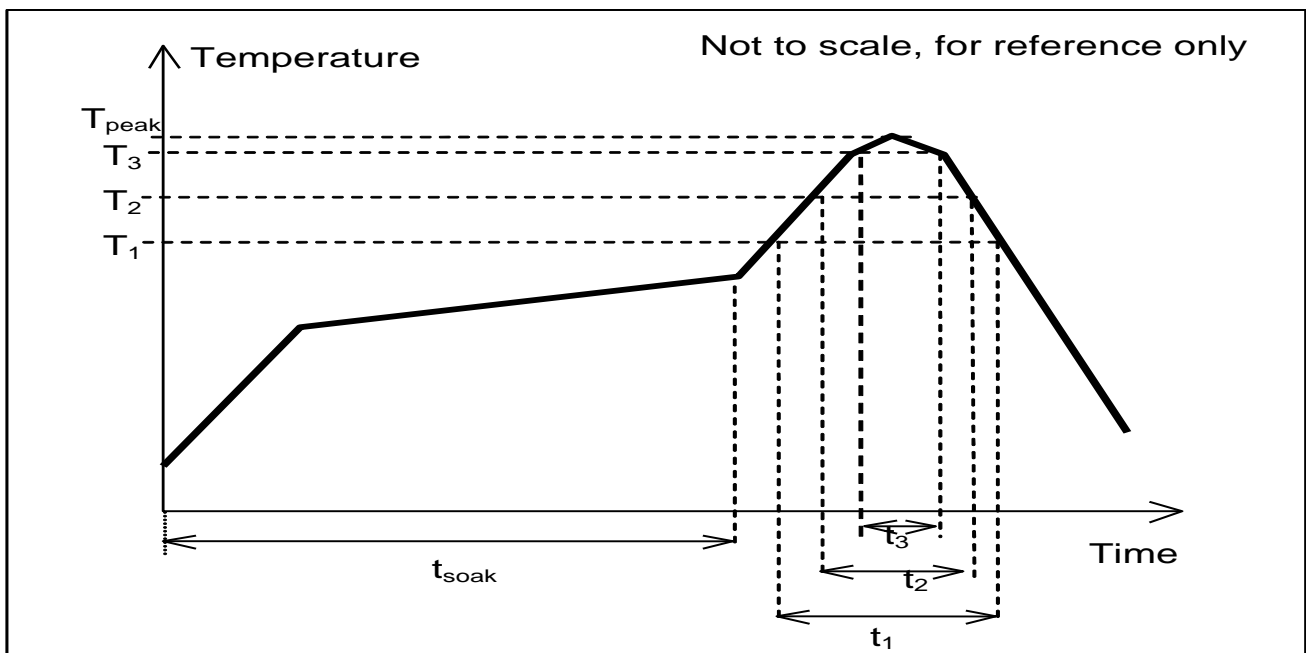

This profile is the minimum requirement for evaluating soldering heat resistance of components. Heat transfer method used for reflow soldering is hot air convection. The actual air temperatures used to achieve the specified profile largely dependent on the reflow equipment.

(這個曲線圖是評估原器件焊接抗熱的基本要求。應用在對流焊接中的熱傳遞方式是熱氣對流。達到特定曲線圖的實際溫度主要依賴於回流焊接設備。)

Material Housing : 029-PA46 (Black)

[SGS Test Report Click here](#)

[如需 SGS 測試報告請點選此處](#)



Datasheet TE250F9 - 00001

45% GF reinforced, flame retardant, grade for E/E applications

Typical properties	Unit	ISO/IEC	DIN	Grade TE250F9
General properties				
Density	g/cm ³	ISO 1183	53479	1,82
Melting temperature	°C	ISO 3146		295
Temperature properties				
HDT-A (1.8 MPa)	°C	ISO 75-1	53461	290
Peak temperature (1min.)	°C	UL 746B		-
Continuous use temperature	°C	IEC 60216		163
- 5000 hrs				
Coeff. linear thermal expansion	E-4/K	DIN 53752		
- // (23-55°C)				0,2
- ⊥ (23-55°C)				0,8
Electrical properties				
RTI electrical	°C,mm	UL 746B		*
Insulation class	-	UL 1446		*
Flammability (at thickness)	class(mm)	UL 94		V-0 (0.8)
Comparative tracking index (CTI)	PLC	IEC 60112		2
Electric strength	kV/mm	IEC 60243-1		
- dry (23°C)				30
- con (23°C/50%RH)				20
Volume resistivity	Ohm.cm	IEC 60093		
- dry (23°C)				1E+15
- con (23°C/50%RH)				1E+10
Mechanical properties				
Izod impact strength (notched)	kJ/m ²	ISO 180-1A		
- dry (23°C)				13
- con (23°C/50%RH)				15
Tensile strength	MPa	ISO 527-1	53455	
- dry (23°C)				200
- con (23°C/50%RH)				130
Tensile Modulus	MPa	ISO 527-1	53457	
- dry (23°C)				17000
- con (23°C/50%RH)				12000
Strain at break	%	ISO 527-1	53455	
- dry (23°C)				2
- con (23°C/50%RH)				3
Dimensional properties				
Moulding shrinkage	%	DSM		
- //				0,3
- ⊥				0,9
Humidity absorption (equi. 23°C/50%RH)	%	ISO 62		1,2

DSM ENGINEERING PLASTICS

All information supplied by or on behalf of DSM in relation to its products, whether in the nature of data, recommendations or otherwise, is supported by research and believed reliable, but DSM assumes no liability whatsoever in respect of the application, processing or use made of the aforementioned information or products, or any consequences thereof. The User undertakes all liability in respect of the application, processing or use of the aforementioned information or product, whose quality and other properties he shall verify, or any consequences thereof. No liability whatsoever shall attach to DSM for any infringement of the rights owned or controlled by a third party in intellectual, industrial or other property by reason of the application, processing or use of the aforementioned information or products by the User.

DSM Kunststoffen BV Trade Register number 31043



PRODUCT SPECIFICATION OF OUPIIN

Material Housing :UL

QMFZ2 Component - Plastics

Monday, April 10, 2006

E47960

DSM ENGINEERING PLASTICS B V

POSTBUS 604 GELEEN 6160 AP NL

Material Designation: **TE250F9(h)(j)**

Product Description: Polyamide 4/6 (PA4/6), glass reinforced, flame retardant, designated "Stanyl" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HA1	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.75	V-0	0	0	140	110	120	-	-
	1.5	V-0	0	0	140	125	125	-	-
	3.0	V-0	0	0	140	130	130	-	-

CTI: 2

IEC CTI (V): -

HVTR: 1

D495: 7

IEC Ball Pressure (°C): -

Dielectric Strength (kV/mm): -

Volume Resistivity (10¹⁰ohm-cm): -

Dimensional Stability(%): -

ISO Tensile Strength (MPa): -

ISO Flexural Strength (MPa): -

ISO Heat Deflection (°C): -

ISO Tensile Impact (kJ/m²): -

ISO Izod Impact (kJ/m²): -

ISO Charpy Impact (kJ/m²): -

(h) Virgin and regrind up to 50% by weight inclusive, have the same basic material characteristics.

(j) Virgin and regrind, up to 100% by weight inclusive, have the same basic material characteristics with respect to Flammability in the 0.75mm thickness and greater.

Report Date: 1/1/2003

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULI.



PRODUCT SPECIFICATION OF OUPIIN

Material Contact : Copper Alloy (Phosphor Bronze)

[SGS Test Report Click here](#)

[如需 SGS 測試報告請點選此處](#)



REPORT OF MATERIAL TEST

DATE: FEB.23,2005 4

Customer: 歐品電子有限公司	Commodity: C 5191 R PHOSPHOR BRONZE STRIP (H)	ISO 9002:4M8Y035-00 台正字第 3545 號
Applied Standard: CNS 9503 Phosphor Bronze Sheets, Plates and Strips		

Chemical Analysis Test										
Work No.	Size of Product			P(%)	Sn(%)	Cu+Sn+P(%)				P.O. NUMBER
	Thickness (mm)	Width (mm)	Length (mm)							
		Standard			0.030 - 0.350	5.50 - 7.00	min. 99.50			
3CC195A	0.300	305.000		0.145	6.000	99.974				

Mechanical & Physical Test										
Work No.	Size of Product			Dimension Test		Tension Test		Hardness Test HV	Grain Size (mm)	Electric Conductivity (%)
	Thickness (mm)	Width (mm)	Length (mm)	Thickness (mm)	Width (mm)	Tensile Strength (kgf/mm ²)	Elongation (%)			
		Standard			-	(-) 0.10 - (+) 0.00	min. 58	-	min. 170	-
3CC195A	0.300	305.000		GOOD.	GOOD.	63.57	21.38	201.0 - 203.0	-	14.4

QC Supervisor 鄭建益

MINCHALI METAL INDUSTRY CO., LTD.
 11, Pei Yuan Road, Chung Li City, Taiwan, R. O. C.
 Tel : (03)4526141-5 (03)4526017-9