
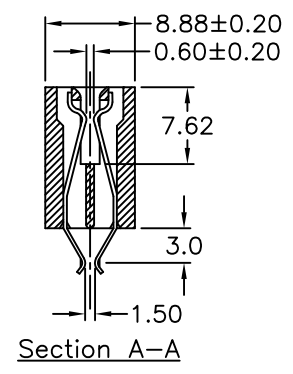
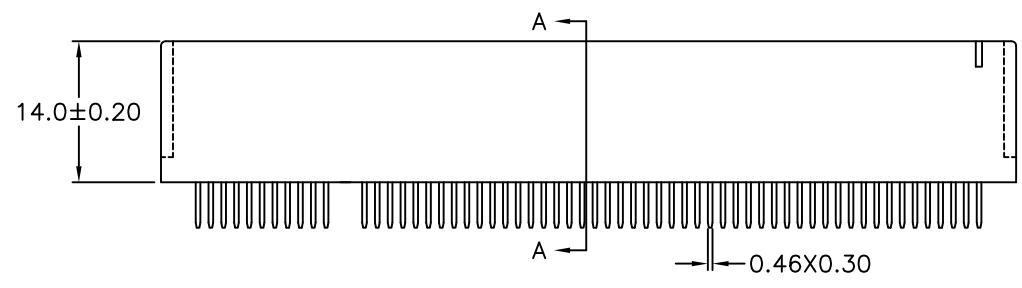


REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: PA66, 30%Glass Filled, UL94V-0, Natural.
Contacts: Brass, Gold Plated on Contact Area and 80~160μ" Tin on Press Fit over Nickel 50~120μ".

Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 500V for 1 minute.
Insulator Resistance: 1000MΩ min, at DC 500V.
Contact Resistance: 30mΩ max, at DC 1000mA.
Operating Temperature: -55°C~+105°C.
***RoHS Compliant**

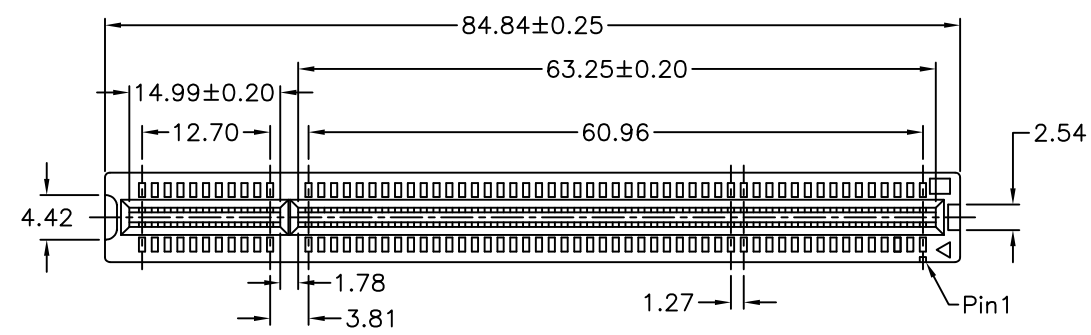

8206- 120 N K B
Series Position N:Internal Code K:Straddle Mount B: Bulk Package

Tolerances x = ±0.5 .x = ±0.25 .xx = ±0.15	Dwg. No.	8206D02011		Title: 8206 Series PCI 120P Connector	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
	Projection							
	Unit	mm	Scale		1:1	SHEET	1/1	Ver.No.
Drawn By	Vic Lyu02/03'16			① 720				