
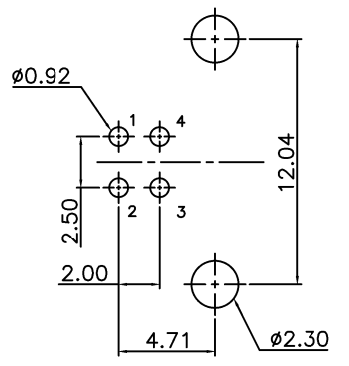
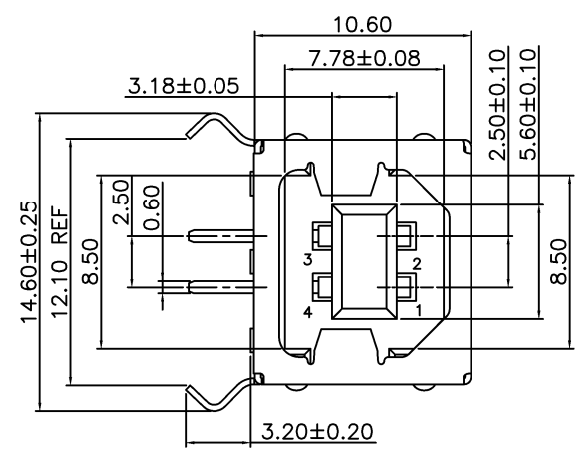
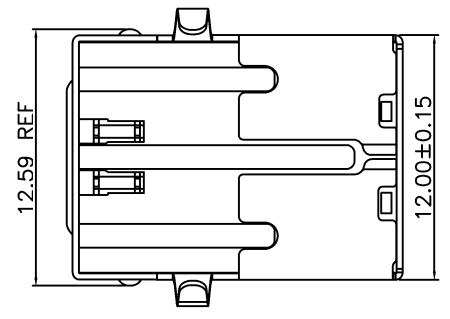


REV.	SPECIFICATION	ECN NO.	APPD.

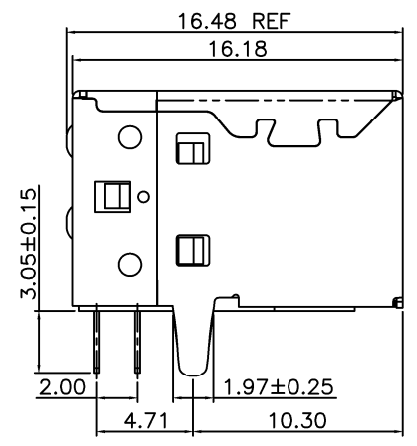

P.C.Board Layout

Material:
Housing: PBT or LCP, UL94V-0.
Contacts: Brass, Gold Plated on Contact Area and 100u" Tin Plated on Solder tail over 50u" Nickel.
Shell: SPCC.

Electrical Characteristics:
Current Rating: 1.5 AMP.
Dielectric Withstanding Voltage: AC 500V.
Insulation Resistance: 1000MΩ min.
Contact Resistance: 30mΩ max.
Operating Temperature: -55°C~+85°C.
***RoHS Compliant**

8968A-B 04 C 00 R W 2 A -HT
Series — Positions — C: Selective Gold Plated — 00: Gold Flash — 30: 30u" — R: Right Angle — W: White — B: Black — HT:LCP — Blank:PBT — A: Tray Package — Type 2

Tolerances	Dwg. No.	8968D02036		Title:		OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 8968A-B04C00RW2A-HT SHEET 1/1 Ver.No. A1
x. = ±0.50	Projection			8968A Series		
.x = ±0.25	Unit	mm	Scale	USB B Type		
.xx = ±0.15	Drawn By	Martin 08/03'21		① 677		