

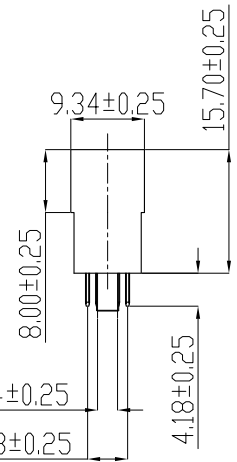
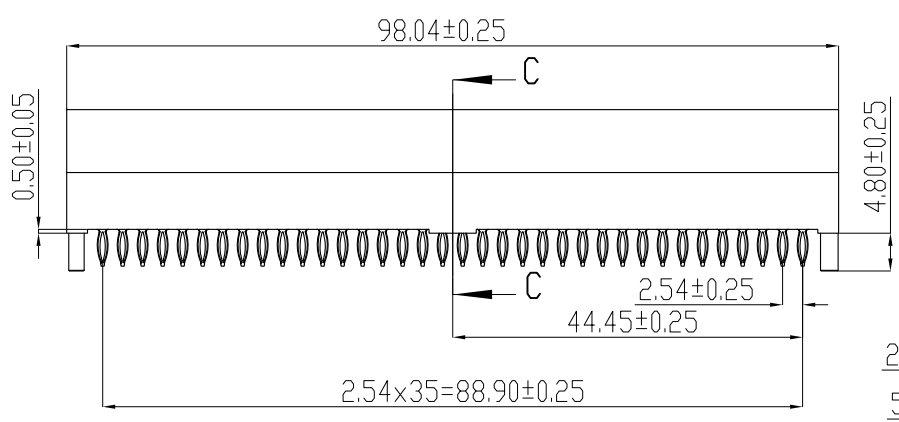


REV.	SPECIFICATION	ECN NO.	APPD.
R3		ECN221122	

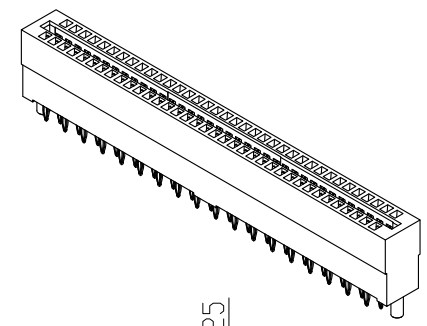



**Material and Plating:**

Housing: High Temperature Plastic UL94V-0  
 Contacts: High Conductivity Copper .  
 Gold Plated on Contact Area and 80u"min Tin Plated or  
 Gold Flash Plated on solder tail or Press Fit over 50u"min Nickel .  
 Or Au+Pd/Ni on Contact Area and 80u"min Tin on solder tail  
 or Press Fit over 50u"min Nickel.

**Electrical Characteristics:**

Current Rating: 12.5 A(UL).  
 Dielectric Withstanding Voltage: DC 1000V For 1 minute.  
 Insulator Resistance: 5000MΩ min. at DC 500V.  
 Contact Resistance: 10mΩ max.  
 Operating Temperature: -5°C ~+105°C .

**\*RoHS Compliant**

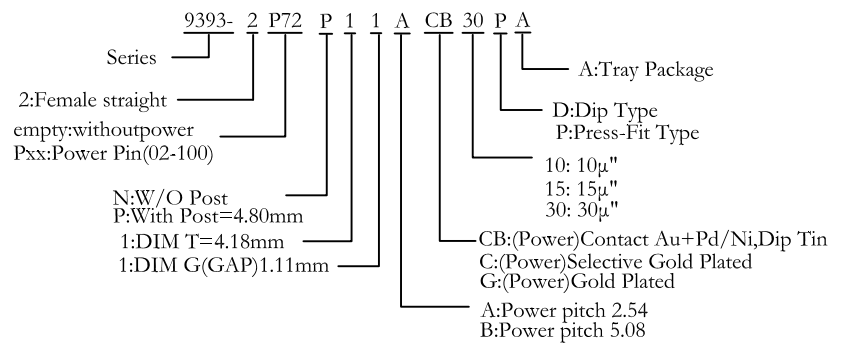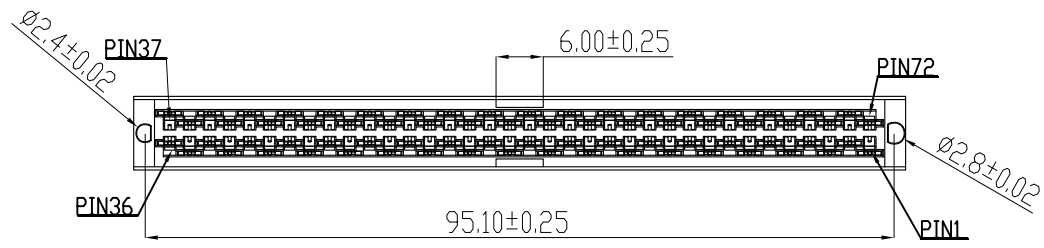


Tolerances	DWG. No.	9393-D0000-003	Title:	
x=±0.50	Projection		9393 Series	
.x=±0.25	Unit	mm	Scale	1:1
.xx=±0.15	Drawn By	ZY 11/14'22	LVDC POWER	
			EDGE CONNECTOR	


©(r)




OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9393-2P72P11ACB30PA			
SHEET	1/2	Ver.No.	R3

REV.	SPECIFICATION	ECN NO.	APPD.
R3		ECN221122	

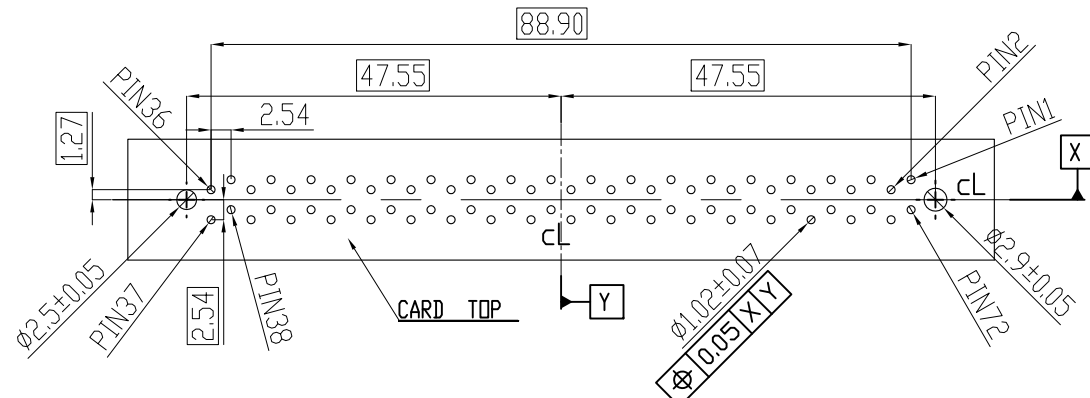

P.C. Board Layout  
 PCB Thickness: 3.18mm  
 Tolerances: ±0.05mm

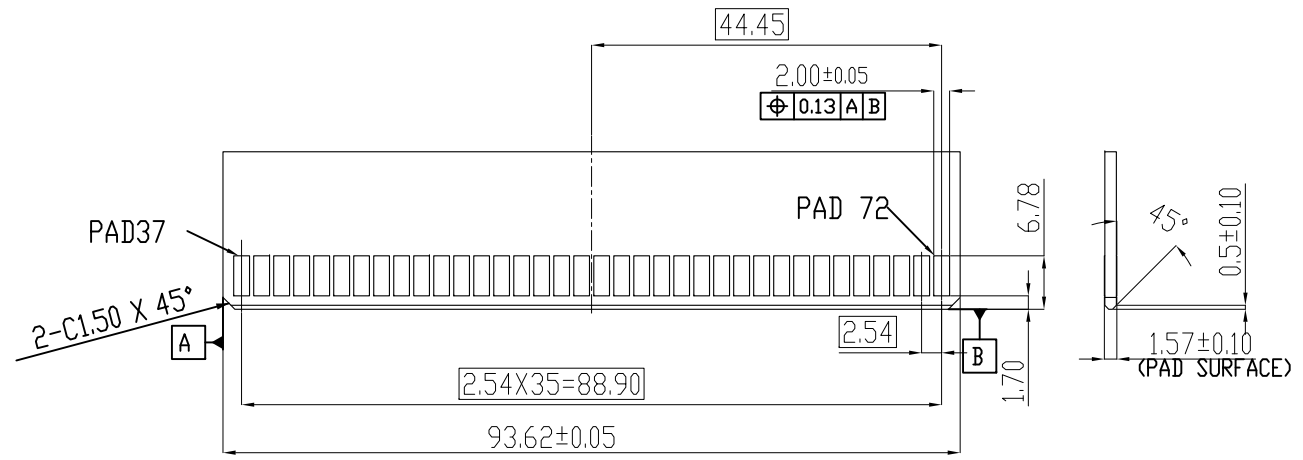

<b>Tolerances</b> x=±0.50 .x=±0.25 .xx=±0.15	<b>DWG. No.</b>	9393-D0000-003		<b>Title:</b>		 <b>OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.</b> P/N: 9393-2P72P11ACB30PA				
	<b>Projection</b>			<b>9393 Series</b> <b>LVDC POWER</b> <b>EDGE CONNECTOR</b>						
	<b>Unit</b>	mm	<b>Scale</b>	1:1			<b>SHEET</b>	2/2	<b>Ver.No.</b>	R3
	<b>Drawn By</b>	ZY 11/14'22								