

REV.	SPECIFICATION	ECN NO.	APPD.
R1			

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0
 Contacts: Copper Alloy.







Electrical Characteristics:

Current Rating: 1 AMP.
 Dielectric Withstanding Voltage: AC 750V For 1 minute.
 Insulator Resistance: 10000MΩ min.at DC 500V.
 Contact Resistance: 20mΩ max.at DC 100mA.
 Operating Temperature: -55°C ~ +125°C.

***RoHS Compliant**

f	T	T	T	T	T	T	T	T	T	C	C	T	T	T	T	T	T	T	T	T		
e	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S		
d	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S		
c	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S		
b	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S		
a	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S		
z	T	T	T	T	T	T	T	T	T	C	C	T	T	T	T	T	T	T	T	T		
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22

CONTACT LAYOUT

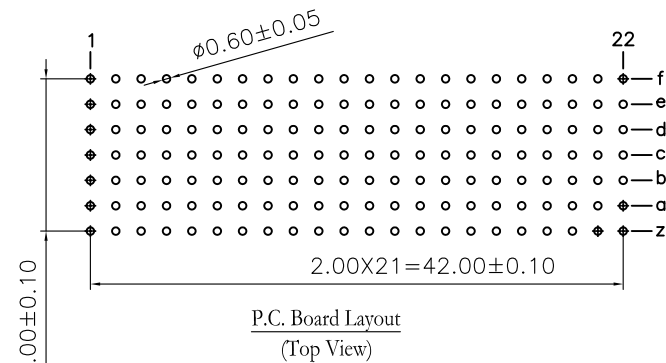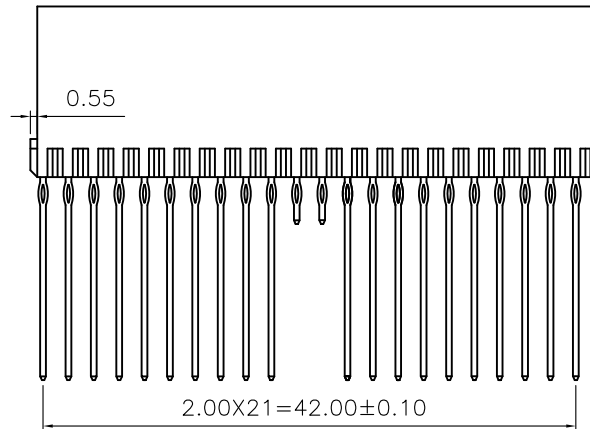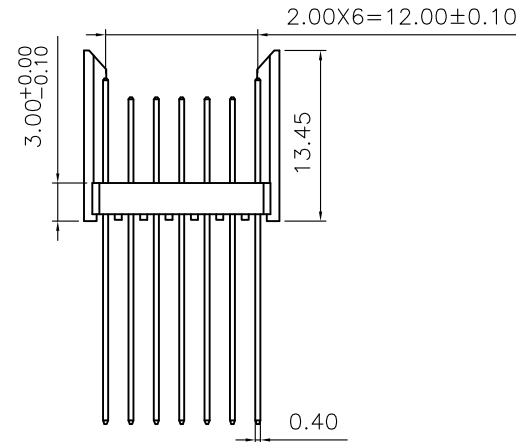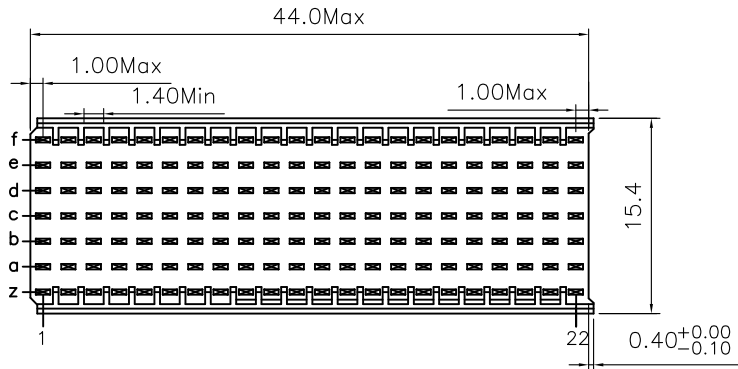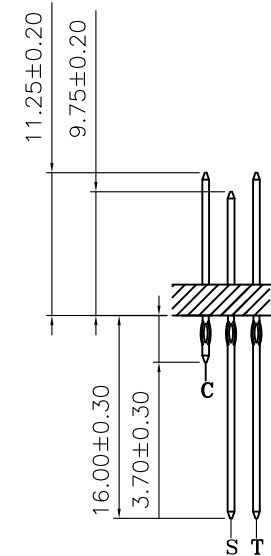

9111- 7 1 B 154 N C xx U
 Series 7Row 1: Male B: Type B Housing Type N:N Option U: Tube Package 10: 10 u" 30: 30 u" C: Dip Tin Contact Gold G: Gold

Tolerances	Dwg. No.	9111D71159		Title:	
x = ±0.5	Projection	⊕ ⊖		9111 Series 2.00 Hard Metric Conntors Male Type B-22	
.x = ±0.25	Unit	mm	Scale		1:1
.xx = ±0.15	Drawn By	Zhu QL 08/15'12			

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9111-71B154NCxxU			
SHEET	1/1	Ver.No.	R1