



REV.	SPECIFICATION	ECN NO.	APPD.
R2		ECN140831	

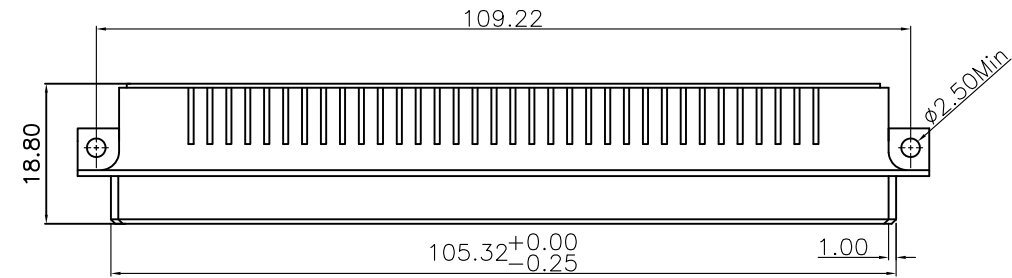

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 AMP.





Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.


Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C~+125°C .

***RoHS Compliant**

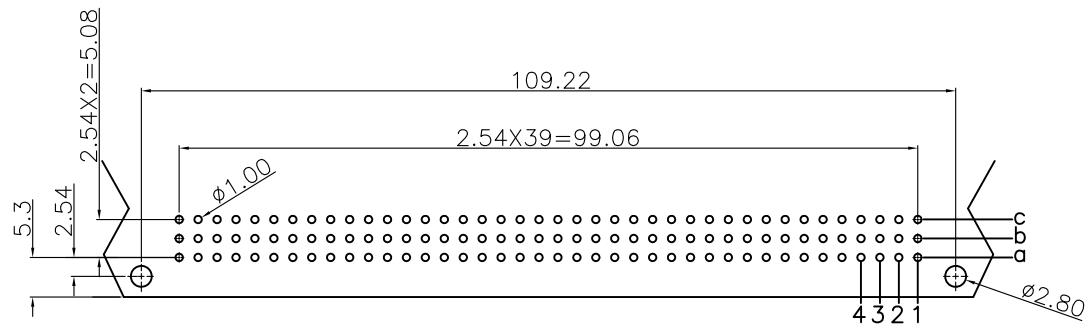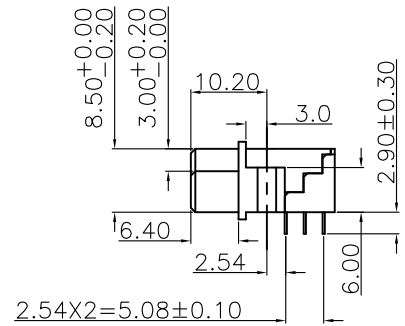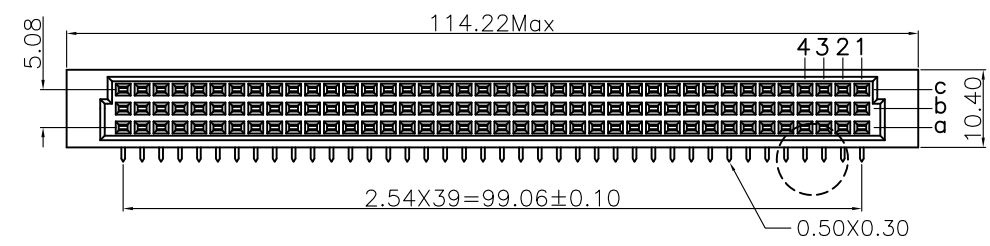

P.C. Board Layout

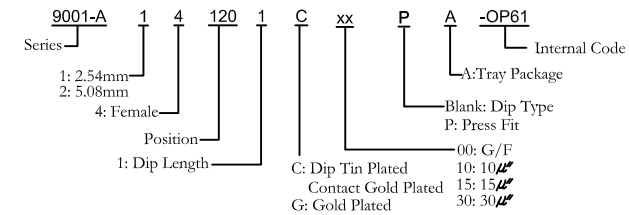

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	120	a b c	
	80	a - c	
	40	a - -	
5.08mm	60	a b c	
	40	a - c	
	20	a - -	

Tolerances	Dwg. No.	9001D14026	Title:	9001 Series DIN41612 R Type Female	OUPIN OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9001-A141201CxxA-OP61
x = ±0.5	Projection			SHEET	
.x = ±0.25	Unit	mm	Scale	1:1	
.xx = ±0.15	Drawn By	WP 09/15'14			Ver.No.
					R2