



PRODUCT SPECIFICATION OF OUPIIN

PRODUCT SPECIFICATION

(產品規格書)

| 產品名稱 Description | 產品料號 Part No. | 圖號 Drawing No. |
|--------------------------------------|---------------------|----------------|
| 7907 Series D-SUB Solder Cup Type | 7907-xxM(F)TBC00A | 7907D03001 |
| | 7907-xxM(F)TBC00N2A | 7907D03009 |
| | 7907-xxM(F)TBG00N5A | 7907D03008 |
| | 7907-50M(F)TBC00A | 7907D03005 |

| PRODUCT NAME (產品名稱) | DOCUMENT No.: (文件編號) | Rev. (版本) | OUPIIN |
|--|-------------------------|-----------------|------------------|
| 7907 Series D-SUB Solder Cup Type (RoHS) | Q7907-PSS-I001 | A (I767) | (歐品) |
| | Approved (核準) | Checked (審核) | Prepared (製作) |
| | Q.A. Section Chief | Ruru Chen | 2023.06.19 |



PRODUCT SPECIFICATION OF OUPIIN

1. SCOPE 範圍

This product specification defines the product performance and the test methods to ascertain the performance of the 7907 Series D-SUB Solder Cup Type , which is designed and manufactured by Oupiin Electronic Co., Ltd. This product specification is applicable but not only for those part numbers which be shown in the cover page.

本產品規格書規定了由歐品電子有限公司設計生產的 7907 Series D-SUB Solder Cup 型連接器產品的特性及測試方法。本產品規格書適用於但不局限於封面所顯示的產品料號。

2. REFERENCE DOCUMENTS 參考文件

| | | |
|---------------|---------------------------------------|-----------|
| MIL-STD-1344A | Test method for electrical connector | 電子連接器測試方法 |
| MIL-STD-202 | Test method for electrical components | 電子零件測試方法 |
| EIA364 | Test method for electrical components | 電子零件測試方法 |

3. FEATURE & DIMENSIONS 特徵及尺寸

3.1. PRODUCT DIMENSION 產品尺寸

These connectors shall have the dimensions as shown in drawing.

本產品的相關尺寸參見圖面。

3.2. PCB/PANEL LAYOUT 印刷電路板佈局

The recommended PCB layout is shown in drawing.

本產品適用的 PCB layout 參見圖面。

3.3. BILL OF MATERIAL 材料清單

Harmful material controlling follows the requirements of RoHS. The bill of material is described in drawing.

有害物質控制符合RoHS指令要求。本產品使用的材料參見圖面。

3.4. MECHANICAL & ELECTRICAL CHARACTERISTIC 機械及電氣特性

The connector shall have the mechanical and electrical performance as described in drawing.

本產品的機械及電氣特性參見圖面。

3.5. PACKAGING 包裝

Products shall be packaged according to requirements specified in purchase order for safe delivery, connector container and the packaging method are shown in package specification.

產品可依客戶指定要求包裝，包裝材料與包裝方式參見產品包裝規範。



PRODUCT SPECIFICATION OF OUPIIN

3.6. RATING CURRENT AND RATING VOLTAGE 額定電流與額定電壓

Rating current : 1A

額定電流：1A

Rating voltage : 150V DC/AC RMS

額定電壓：150V DC/AC RMS

3.7. STORAGE AND OPERATING TEMPERATURE 儲存與使用溫度

Temperature range : -55°C ~+105°C.

Storage Temperature : 0°C ~+40°C, Humidity : 80%RH under. Time limit is 12 months the products are stored.

溫度範圍：-55°C ~+105°C。

儲存溫度：0°C ~+40°C，濕度：80%RH 以下，產品限存時間為 12 個月。

4. ENVIRONMENTAL 環境要求

4.1. SOLDERABILITY 可焊性

Connectors meet solder-ability to EIA-364-52.and shall be free of contaminants.

產品可焊性符合 EIA-364-52. 標準規定的相關要求，表面不得有污染物

4.2. RESISTANCE TO SOLDER HEAT 耐焊接熱

4.2.1. WAVE SOLDER 波峰焊接

Each cycle consists of three consecutive phases. as shown in Table II.

每個焊接週期包括三個連續的階段，見附表二

Note: 說明

Device temperature measurements are referenced from the top-center of the package outer surface.

設備溫度量測時以從頂部中間位置測量為準。

5. PERFORMANCE AND TEST DESCRIPTION 性能及測試

5.1. REQUIREMENT 要求

Product is designed to meet electrical, mechanical, and environmental performance requirements specified in Table I.

本產品設計符合附表一所列的機械，電氣及環境要求。



PRODUCT SPECIFICATION OF OUPIIN

5.2. TEST CONDITION 測試條件

Unless otherwise specified, all tests shall be performed at ambient environmental conditions.
除非特別註明，所有測試在室溫條件下完成

5.3. SAMPLE SELECTION 樣品選擇

Test samples shall be selected at random from current production. No test samples shall be reused. Samples are pre-conditioned with 10 cycles of durability. Each group shall be containing 5 test samples.
測試樣品從現生產的產品中隨機抽取，所有測試過的樣品不得重複使用。樣品已預先插拔10次，每組測試有5個樣品。



PRODUCT SPECIFICATION OF OUPIIN

Table I : Test Requirements and Procedures

附表一：測試要求


| Items (項目) | Requirements (要求) | Test Methods (檢測方法) |
|---|--|--|
| 1. Confirmation of Product 產品確認 | Product shall be conforming to the requirements of applicable product drawing. 產品必須滿足相關檔的規定 | Visually, dimensions and functionally inspected per applicable product drawing. 依相關產品圖面，檢查產品的外觀、尺寸及功能 |
| 2. Contact Resistance 接觸阻抗 | 20 mΩ Max. 最大 | Subject mated contacts assembled in housing to circuit of 100 mA max. at voltage of 20 mV max. Per EIA-364-06 所述固定在外殼裡的端子連結到一個回路中測試，電流 100 mA，電壓 20 mV max. 適用：EIA-364-06 |
| 3. Insulation Resistance 絕緣阻抗 | 1000 MΩ Min. 最小 | Measure by applying test potential between the adjacent contacts, and between the contacts and ground in the mated connector. (500 V DC±10%). Per EIA-364-21 測試產品端子間以及端子與接地間的電阻 (500V DC±10%) 適用：EIA-364-21 |
| 4. Dielectric Withstanding Voltage 耐電壓 | There shall be no breakdown. 無擊穿現象出現 | Connector must withstand test potential of 1000V AC for 1 minute. Per EIA-364-20 樣品必須承受測試電壓 1000V AC，時間 1 分鐘 適用：EIA-364-20. |
| 5. Solder ability 可焊性 | There shall have a solder coverage of 95% minimum。 產品在測試完成後，焊接部位粘錫面積大於 95%。 | Soldering time : 3 to 5 seconds. Temperature : 245±5°C Per EIA-364-52 焊接時間：3~5 秒 溫度：245±5°C 適用：EIA-364-52 |



PRODUCT SPECIFICATION OF OUPIIN

Table II : Weld the curve graph in crest

附表二：波峰焊曲線圖

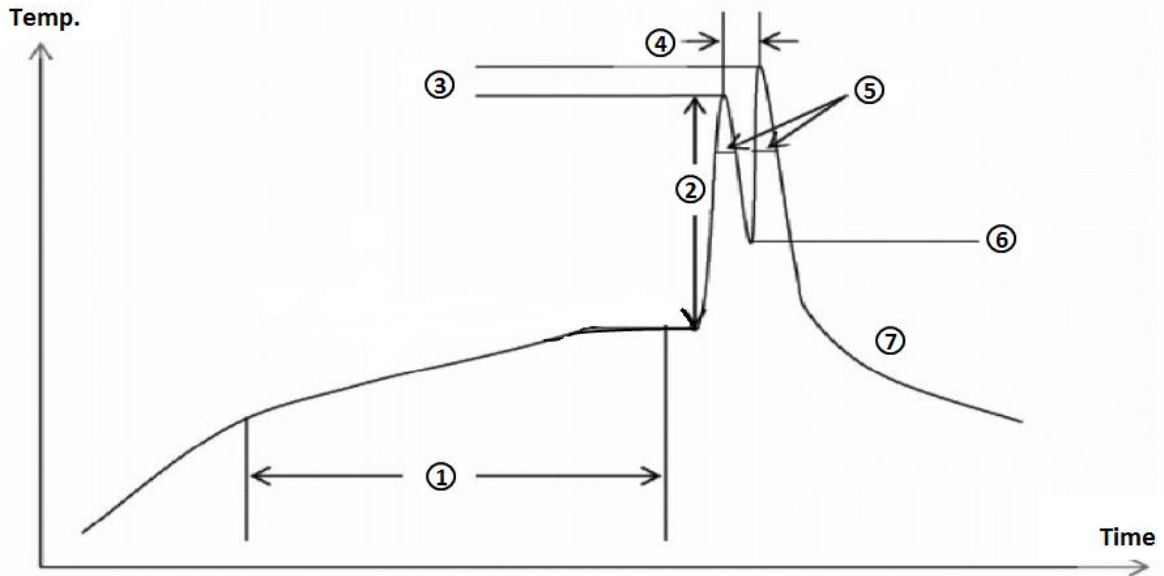

- ① Preheat 80sec (1~2°C/s)
- ② $\Delta T < 150^\circ\text{C}$
- ③ 235~245°C
- ④ 1~3sec

- ⑤ Dip Time 3~6sec
- ⑥ $> 200^\circ\text{C}$
- ⑦ Cooling -5°C/s