


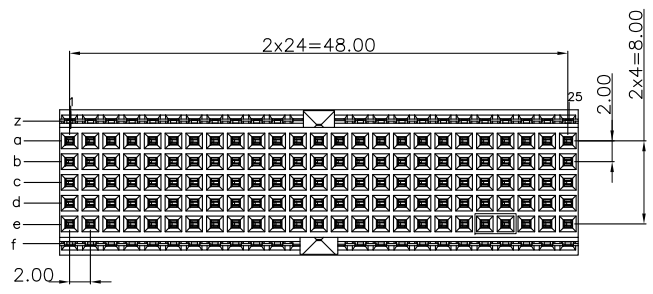
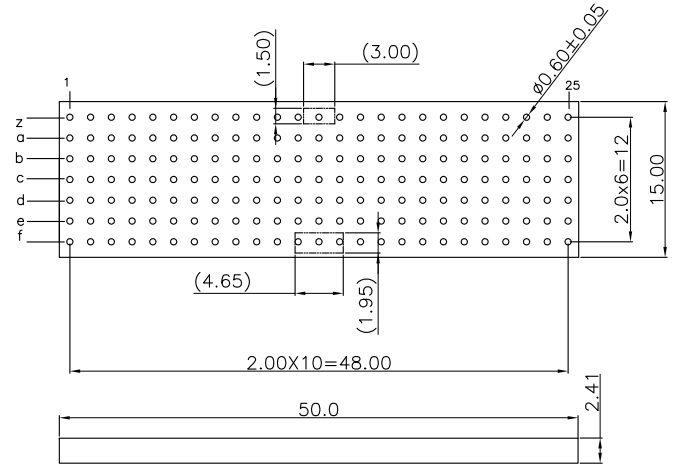


REV.	SPECIFICATION	ECN NO.	APPD.
R7		ECN190308	

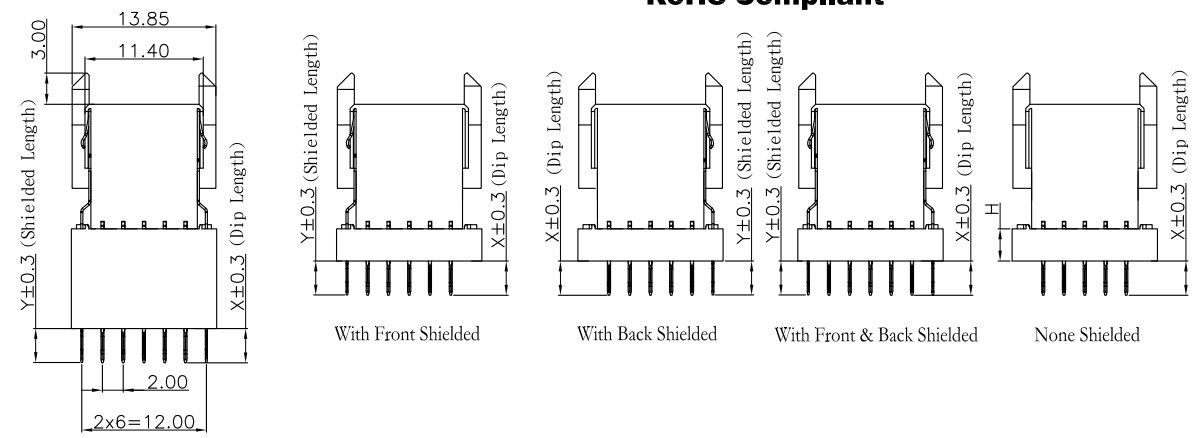

**Material:**  
Housing: High Temperature housing UL94V-0 .  
Contacts: Copper Alloy

**Electrical Characteristics:**  
Current Rating: 1 AMP .  
Dielectric Withstanding Voltage: AC 750V For 1 minute.  
Insulator Resistance: 10000MΩ min. at DC 500V.  
Contact Resistance: 20mΩ max. at DC 100mA.  
Operating Temperature: -55°C ~+125°C .  
**\*RoHS Compliant**

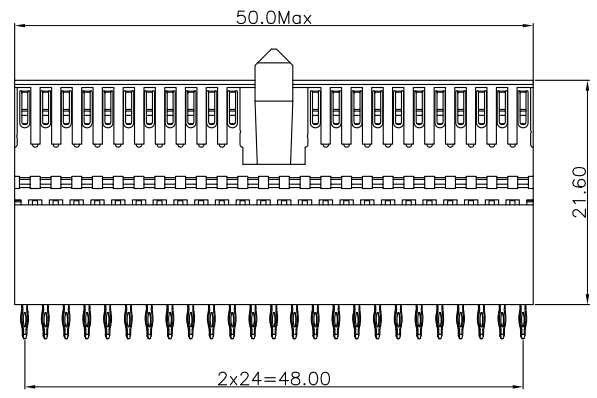

**9111- 7 4 AB 125 1 2 1 H2 CB xx U**

Series: 7Row, 4: Female, AB: Type AB, Position: 0:Dip Length 3.1mm, 1:Dip Length 3.3mm, 2:Dip Length 3.7mm, 1: None Shielded, 2:With Front & Back Shielded

U: Tube Package  
30: 30 u"  
CB: Selective Gold Plated  
Blank : W/O Spacer  
H1: With Spacer 3.1mm  
H2: With Spacer 9.6mm  
Blank : Without Shielded  
0: Shielded Length 3.1mm  
1: Shielded Length 3.3mm  
2: Shielded Length 3.7mm

Dip Length	X	0	1	2
		3.1	3.3	3.7
Shielded Length	Y	0	1	2
		3.1	3.3	3.7
Spacer Length	H	H1	H2	
		3.1	9.6	

P.C.Board Layout  
(Tolerance:±0.05)

Tolerances	Dwg. No.	9111-D0000-030		Title:	
x = ±0.5	Projection			9111 Series Hard Metric Connector Female Straight Type AB	
.x = ±0.25	Unit	mm	Scale		1:1
.xx = ±0.15	Drawn By	XFF	03/06'19		

**OUPIN**  
**OUPIN ELECTRONIC(KUNSHAN) CO., LTD.**  
P/N: 9111-74AB125121H2CBxxU  
SHEET 1/1 Ver.No. R7