
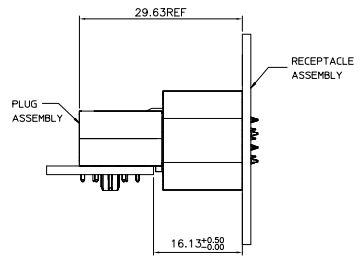


REV.	SPECIFICATION	ECN NO.	APPD.
X3			

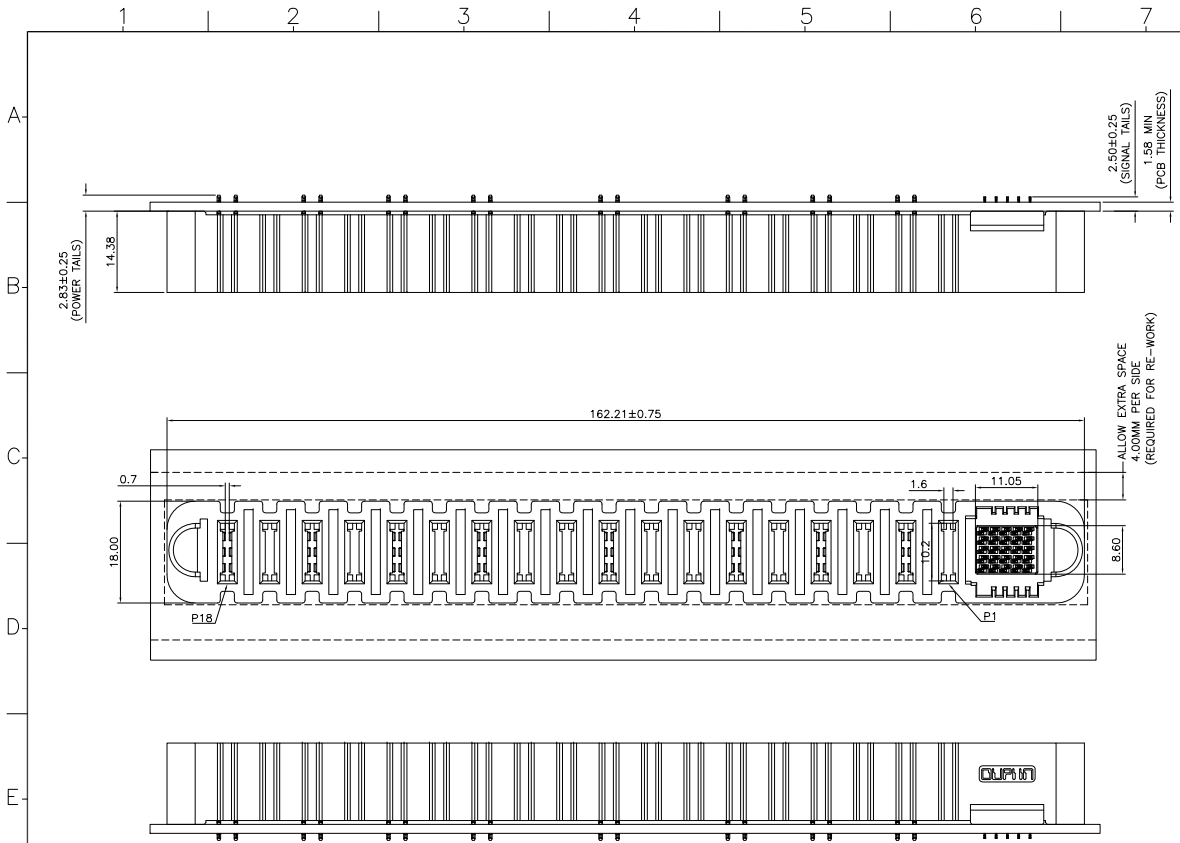

Material and Plating:
Housing: LCP,UL94V-0 , BLACK.
Power Contacts: High Conductivity Copper.
 Au+Pd/Ni or Gold Plated on Contact Area and 80u" Min Tin Plated on Press Fit over Nickel 50u" Min .
Signal Contact: Phosphor Bronze.
 Au+Pd/Ni or Gold Plated on Contact Area and 80u" Min Tin Plated on Press Fit over Nickel 50u" Min .


Electrical Characteristics:
Current Rating: Signal Pin 2.5 AMP.
 Power Pin 60 AMP.
Dielectric Withstanding Voltage: DC 1500V For 1 minute.
Insulator Resistance: 5000MΩ min.

Contact Resistance: Signal Pin 30mΩ max.
 Power Pin 0.3mΩ max.
Operating Temperature: -40°C ~+105°C .


***RoHS Compliant**

Notes 1:
 L: Low Power---PCB Mount 3.0mm Pitch
 D: DC Power---PCB Mount 5.5mm Pitch
 A: AC Power---PCB Mount 7.5mm Pitch

Notes 2:
 P1,P3,P5,P7,P8,P10,P11,P13,P15,P17 Without Contact.

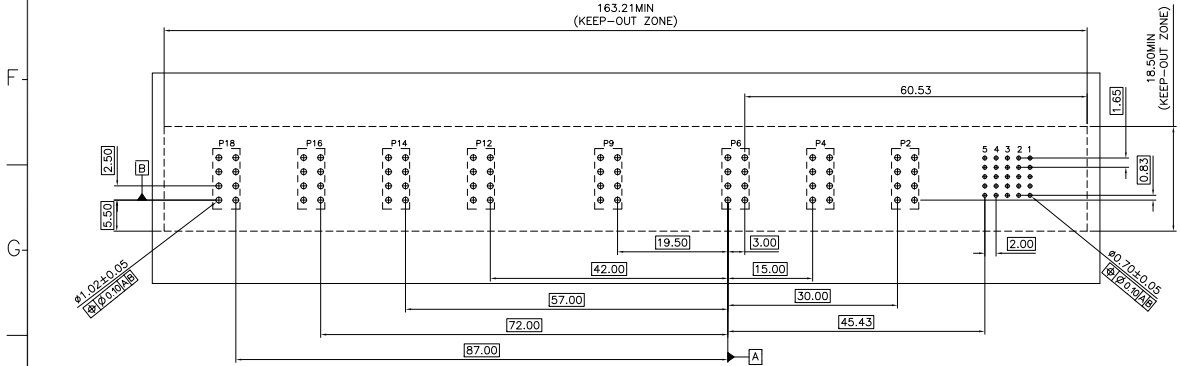

P.C.Board Layout
(Tolerance:±0.05)

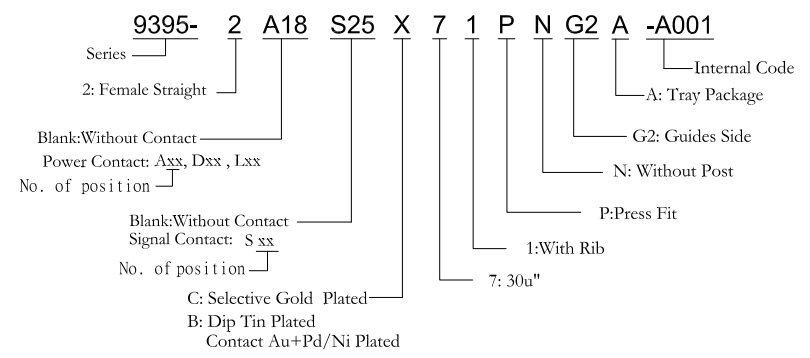

Tolerances	Dwg. No.	9395-D0000-022
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	WP 05/21'19

Title: 9395 Series
 Max P60
 10mm Low Profile, 60Amp
 Receptacle, Straight

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9395-2A18S25X71PNG2A-A001			
SHEET	1/1	Ver. No.	X3