

REV.	SPECIFICATION	ECN NO.	APPD.
R1		ECN200724	

Material and Plating:

Housing: LCP,UL94V-0 , BLACK.
 Power Contacts: High Conductivity Copper.
 30u"Au+Pd/Ni on Contact Area and 80u" Min Tin Plated on Solder Tail over nickel 50u" Min .
 Signal Contact: Phosphor Bronze.
 30u"Au+Pd/Ni on Contact Area and 80u" Min Tin Plated on Solder Tail over nickel 50u" Min.







Electrical Characteristics:

Current Rating: Signal Pin 2.5 AMP.
 Power Pin 60 AMP.
 Dielectric Withstanding Voltage: DC 1500V For 1 minute.
 Insulator Resistance: 5000MΩ min. at DC 500V.
 Contact Resistance: Signal Pin 30mΩ max.
 Power Pin 0.3mΩ max.
 Operating Temperature: -40°C ~+105°C .

***RoHS Compliant**

Note 1 :

L: Low Power---PCB Mount 3.0mm Pitch
 D: DC Power---PCB Mount 5.5mm Pitch
 A: AC Power---PCB Mount 7.5mm Pitch

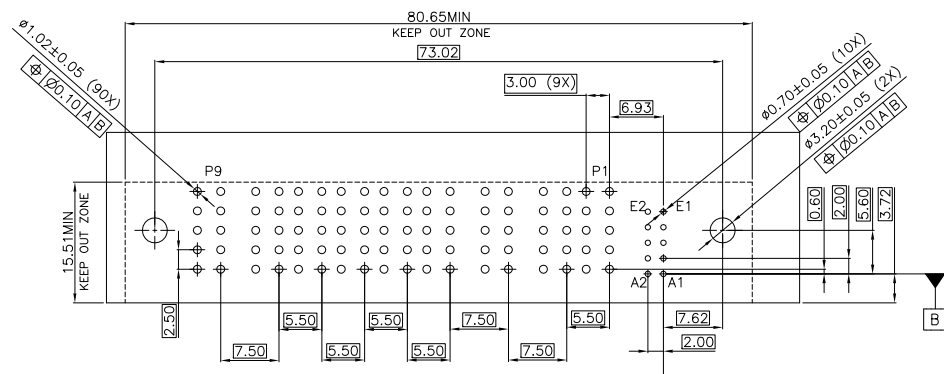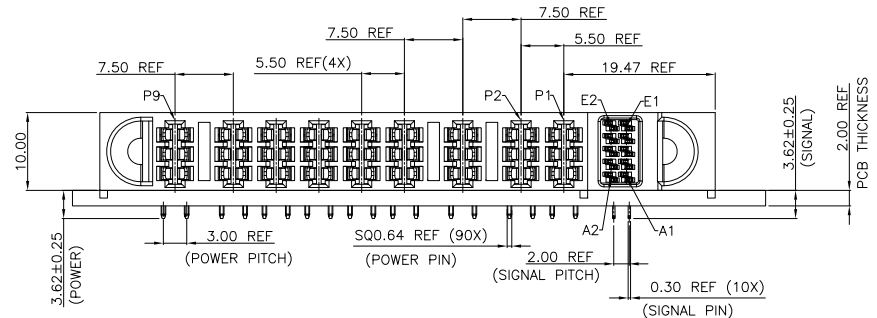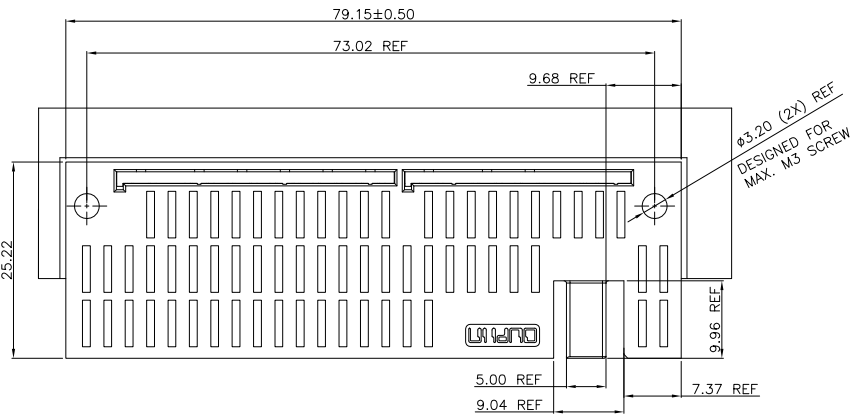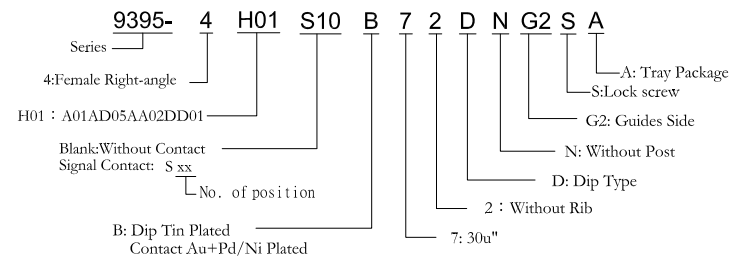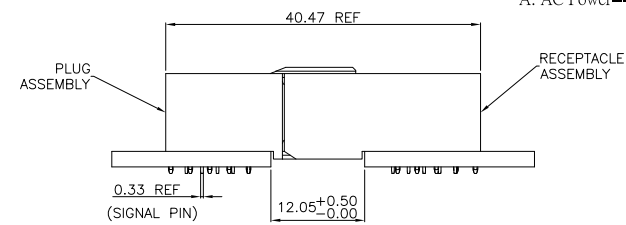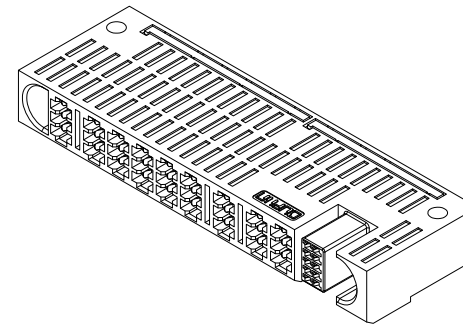

P.C.Board Layout
(Tolerance:±0.05)

Tolerances	Dwg. No.	9395-D0000-026	Title:		9395 Series					
x = ±0.5	Projection		Max P60		10mm Low Profile, 60Amp					
.x = ±0.25	Unit	mm	Scale	1:1	Receptable, Right Angle		OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9395-4H01S10B72DNG2SA			
.xx = ±0.13	Drawn By	WP 07/11'20					SHEET	1/1	Ver. No.	R1