

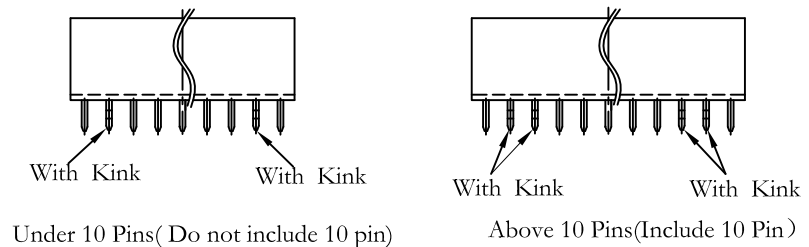
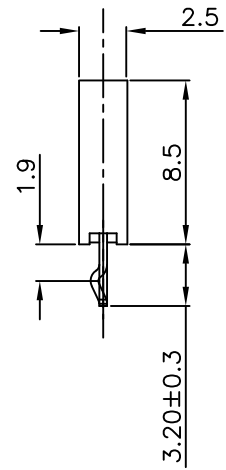
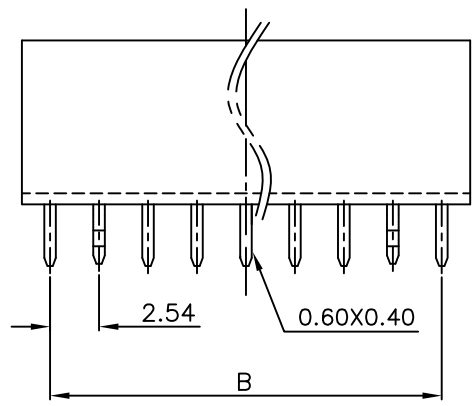



| | | | |
|------|---------------|-----------|-------|
| REV. | SPECIFICATION | ECN NO. | APPD. |
| R4 | | ECN160328 | |

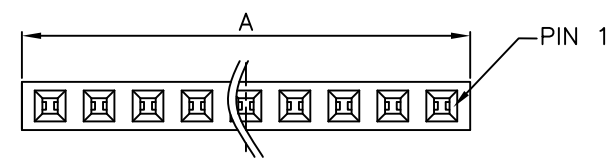

Hint In The Position of Kink

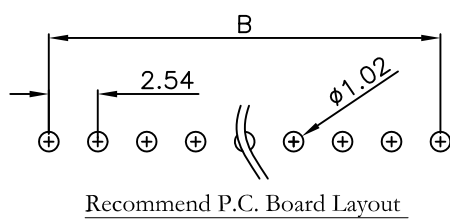

2044- 1 X xx G xx S K A
 Series Single Row No. of Pin Per Row G: Gold Plated T: Tin Plated
 A: Tray Package
 K: With Kink
 S: Straight
 00: G/F
 10: 10μ"
 15: 15μ"
 30: 30μ"

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0
 Contacts: Copper Alloy

Electrical Characteristics:

Current Rating: 2 AMP.
 Dielectric Withstanding Voltage: AC 1000V for 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 20mΩ max. at DC 100mA.
 Operating Temperature: -55°C~+105°C
***RoHS Compliant**

Insertion Depth: 2.55mm to 6.20mm.
 Suitable for P.C.B. Thickness=1.60mm

| | |
|-----------|-----------------------------|
| Position | 2 Thru 40 |
| Dimension | |
| A | 2.54 X No. of Position +0.4 |
| B | 2.54 X No. of Position-2.54 |

| | | | | | |
|-------------|------------|----------------|----------|---|-----|
| Tolerances | Dwg. No. | 2044-D0000-023 | Title: | | |
| x = ±0.5 | Projection | | | 2044 Series P.C.B. Socket 2.54mm(0.100") | |
| .x = ±0.25 | Unit | mm | Scale | | 1:1 |
| .xx = ±0.15 | Drawn By | ycj | 03/15'16 | | |

OUPIN

OUPIN ELECTRONIC(KUNSHAN) CO., LTD.

P/N: 2044-1XxxGxxSKA

| | | | |
|-------|-----|----------|----|
| SHEET | 1/1 | Ver. No. | R4 |
|-------|-----|----------|----|