






Section: A-A
Scale: 1 : 1




SECTION: B-B
Scale: 1 : 1

Series 9114 - A 2 2 L S06 CB30 -CB30 P P A
 A: Type A
 2: 2Row
 2: Power Pin
 L: Left
 Blank: Without Signal
 Signal Contact: Sxx
 No. of Position
 A: Tray Package
 P: With Post
 N: Without Post
 P: Press fit Type
 CB: Contact Au+Pd/Ni, Dip Tin
 Signal Pin: 30u"
 CB: Contact Au+Pd/Ni, Dip Tin
 Power Pin: 30u"




Long PIN 
 Short PIN 

Type No	Product No.
	(A Type) 9114-A22LS06CB30-CB30PPA
	(B Type) 9114-B22LS06CB30-CB30PPA

Tolerances	Dwg. No.	9114-D0000-025	Title:
x = ±0.5	Projection		9114 Series Female Power+Signal Connector
.x = ±0.25	Unit	mm	
.xx = ±0.15	Scale	1:1	
	Drawn By	MXM 11/09'17	

OUPIIN			
OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9114-A22LS06CB30-CB30PPA			
SHEET	1/2	Ver. No.	R1

REV.	SPECIFICATION	ECN NO.	APPD.
R1		ECN171119	

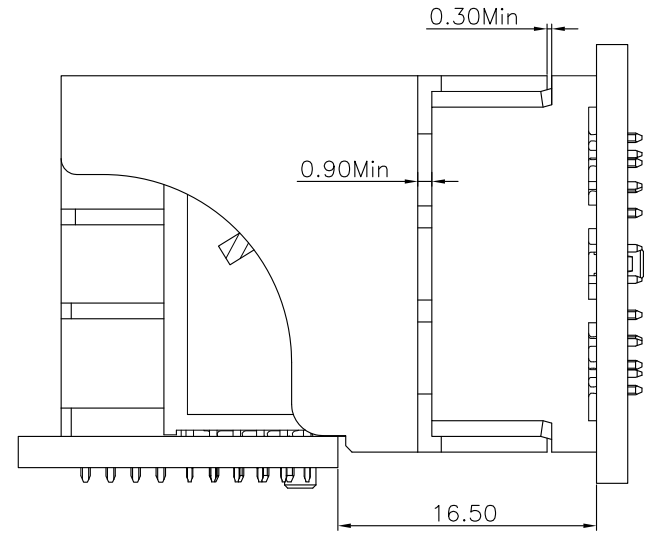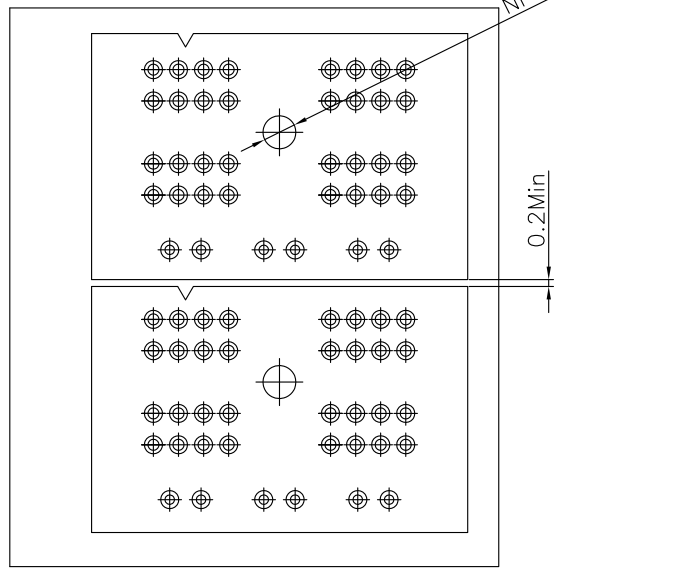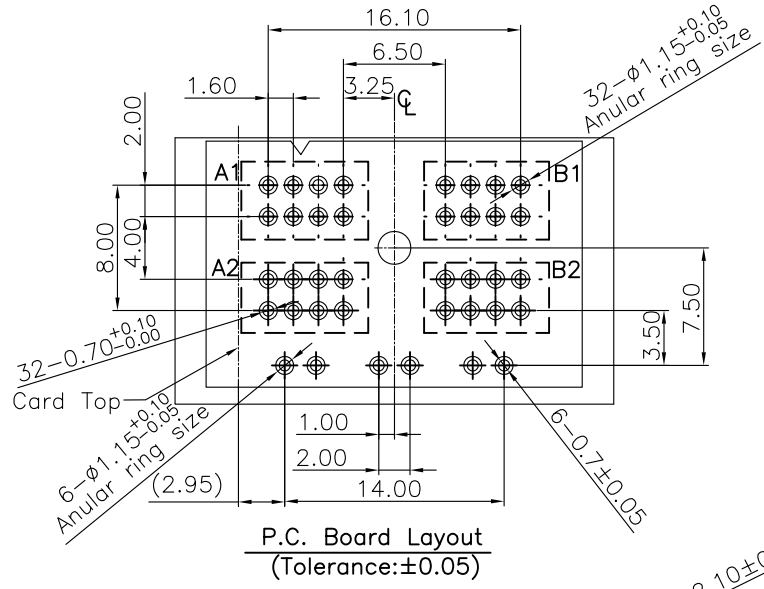



REV.	SPECIFICATION	ECN NO.	APPD.
R1		ECN171119	

Material and Plating:
Housing: LCP, UL94V-0.
Power Contacts: C18080.
Signal Contact: Copper Alloy.

Electrical Characteristics:
Current Rating: Power: 35 AMP (2ozx2); 45 AMP (2ozx4)
Signal: 1AMP.
Dielectric Withstanding Voltage:
Power: AC 1500V For 1 minute.
Signal: AC 750V For 1 minute
Insulator Resistance: Power: 1500MΩ min. at DC 500V.
Signal: 1000MΩ min. at DC 500V.
Contact Resistance: Power: 0.5mΩ max.
Signal: 30mΩ max.
Operating Temperature: -55°C ~ +125°C.

***RoHS Compliant**

Plating:
Terminal: Contact Area: Gold Flash over minimum
Au(3u") + Pd/Ni (27u")
Press Fit: Matte Tin Plating: 80~160u"

Tolerances	Dwg. No.	9114-D0000-025	Title:		 OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9114-A22LS06CB30-CB30PPA			
x = ±0.5	Projection		9114 Series					
.x = ±0.25	Unit	mm	Scale	1:1	Female Power+Signal Connector			
.xx = ±0.15	Drawn By	MXM 11/09'17			SHEET	2/2	Ver. No.	R1