



REV.	SPECIFICATION	ECN NO.	APPD.
R2		ECN120405	

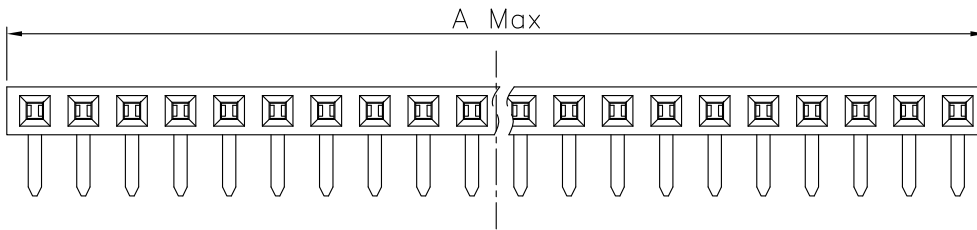

Material:




Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 Minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C~+105°C .

***RoHS Compliant**

Insertion Depth: 2.55mm to 4.50mm.

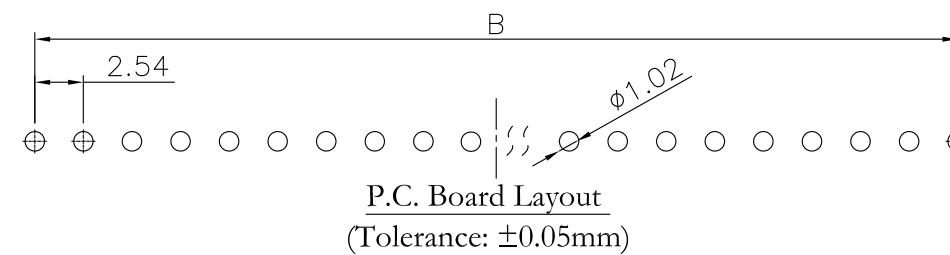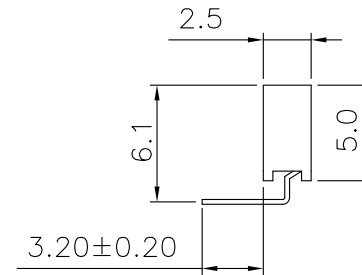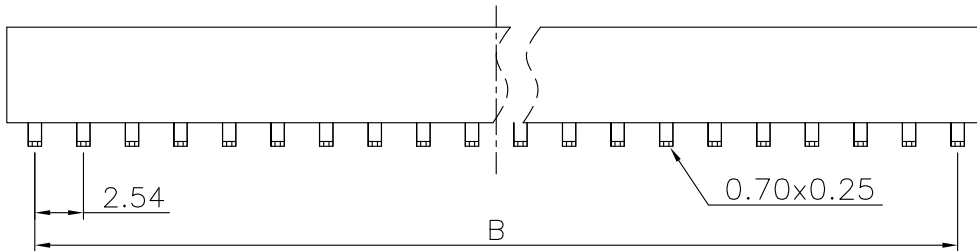

2041- 1 X xx G xx R A
 Series | Single Row | No. of Pin Per Row | G: Gold Plated | T: Tin Plated
 A: Tray Package | B: Bulk Package | R: Right Angle
 00: G/F | 10: 10 μ" | 15: 15 μ" | 30: 30 μ"

Position Dimension	2 Thru 40
A	2.54 X No. of Position
B	2.54 X No. of Position -2.54

Tolerances	Dwg. No.	2041-D0000-003
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	ZJJ 04/05'12

Title:
2041 Series
P.C.B. Socket 2.54mm
(0.100")

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 2041-1XxxGxxRA			
SHEET	1/1	Ver.No.	R2