



REV.	SPECIFICATION	ECN NO.	APPD.







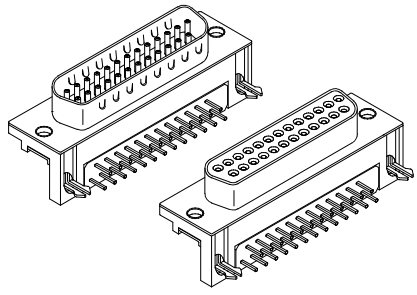


Material:
Housing: PBT, UL94V-0, Black.
Male Contacts: Brass, Gold Plated on Contact Area and Gold Flash on Solder Tail over Nickel 30u".
Female Contacts: Brass, Gold Plated over Nickel 30u".
Shell: Steel, Nickel Plated.
Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V.
Insulation Resistance: 1000MΩ min.
Contact Resistance: 30mΩ max.
Operating Temperature: -20°C~+70°C.
***RoHS Compliant**

Male

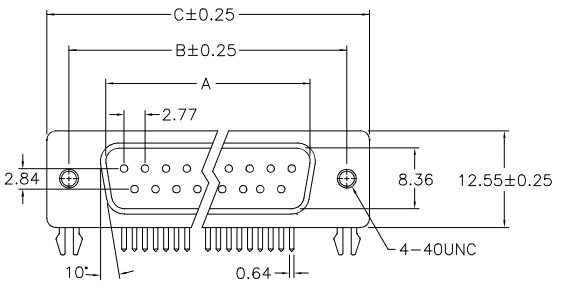

Female

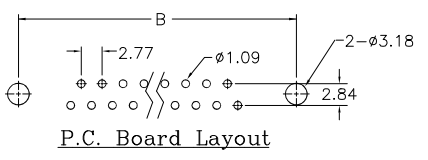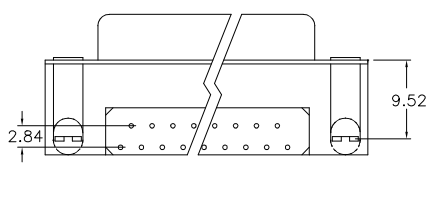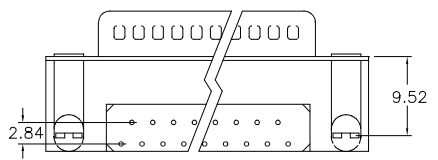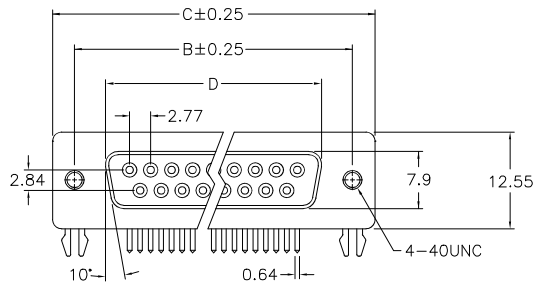

7926- xx x H A
 Series —
 No. of Positions —
 M: Male
 F: Female
 A: Tray Package
 H: With Grounding Forks
 With Riveted Threaded Inserts and with Jack Screws are Bagged Separately

Positions	A	B	C	D
9	16.92	24.99	30.81	16.33
15	25.25	33.32	39.14	24.66
25	38.96	47.04	53.04	38.38
37	55.42	63.50	69.32	54.84

Tolerances	Dwg No.	7926D03003	
x. = ±0.50	Projection		
.x = ±0.25	Unit	mm	Scale 1:1
.xx = ±0.15	Drawn By	Martin 12/07'22	

Title: 7926 Series
 D-SUB Right Angle
 Filter Type
 512

OUPIIN			
OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 7926-xxMHA&7926-xxFHA			
SHEET	1/1	Ver.No.	A2