

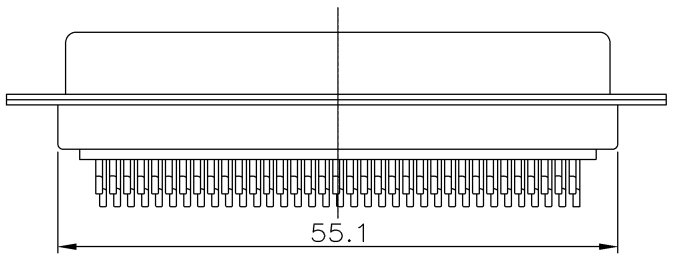
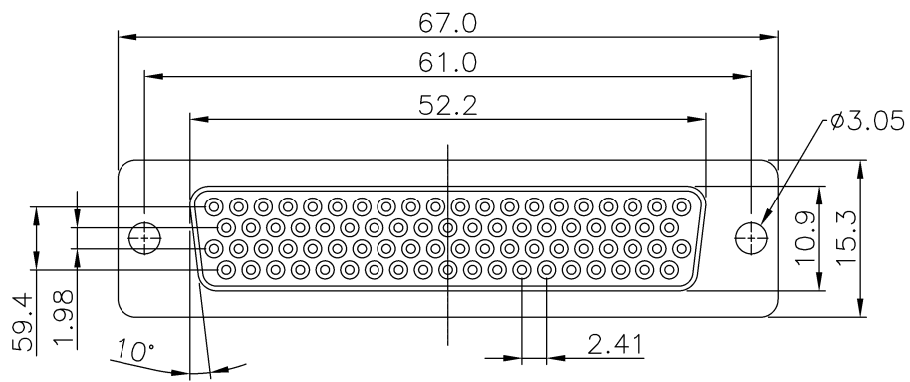


REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: PBT, UL94V-0.
Contacts: Brass, Gold Plated on Contact Area and 80~100u"
Min Tin Plated on solder tail over Nickel 30u"
or Gold Plated over Nickel 30 u".
Shell: Steel.
Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V.
Insulation Resistance: 1000MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -55°C~+105°C.
***RoHS Compliant**



7917- 78 F T B C 00 A
Series ———
Position ———
F: Female ———
B: Black ———
A: Tray Package
00: Gold Flash
C: Selective Gold Plated
G: Gold Plated

Tolerances	Dwg. No.	7917D02001	Title:		 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 7917-78FTBC00A SHEET 1/1 Ver.No. A6
x = ±0.5	Projection		7917 Series		
.x = ±0.25	Unit	mm	Scale	1:1	
.xx = ±0.15	Drawn By	Martin 11/08'22	Scale	1:1	
H.D. D-SUB 78P Solder Cup Type ①767					