
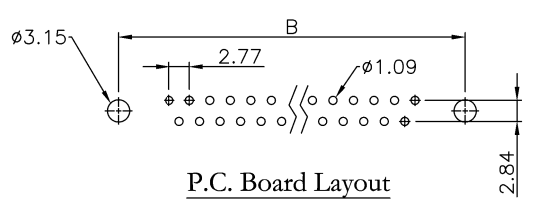
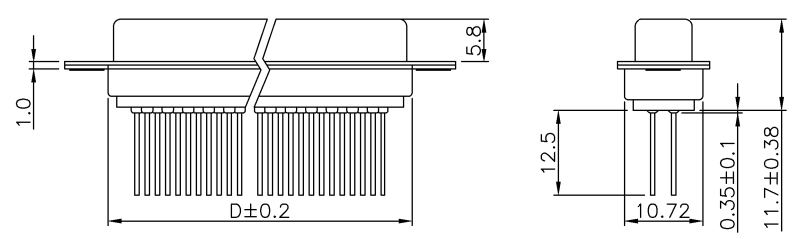
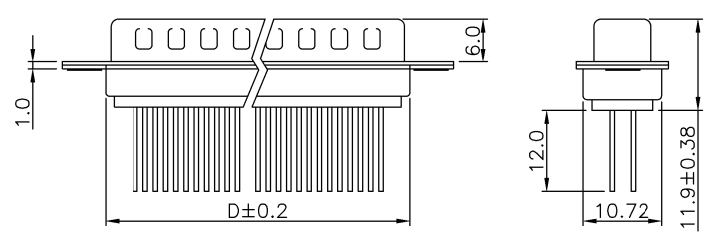
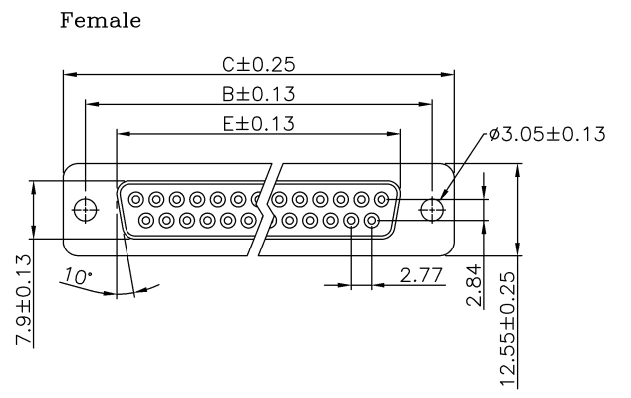


REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: PBT, UL94V-0.
Contacts: Brass, Gold Plated over Nickel 30 u" Min.
Shell: Steel.

Electrical Characteristics:
Current Rating: 3 AMP.
Dielectric Withstanding Voltage: AC 1000V.
Insulation Resistance: 1000MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -55°C~+105°C.
***RoHS Compliant**

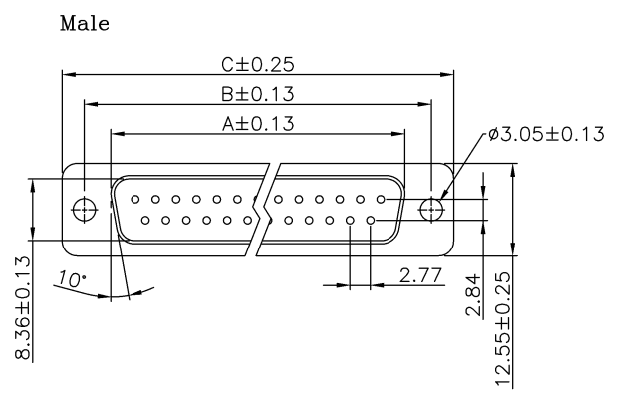

7905- xx M T B W G 00 A

Series — 7905-
Position — xx
M: Male
F: Female
B: Black
U: Blue
W: White

A: Tray Package
00: G/F
G: Gold Plated
W: Wire Wrap

Position	Dimension				
	A	B	C	D	E
09	16.92	24.99	30.81	19.28	16.33
15	25.25	33.32	39.14	27.51	24.66
25	38.96	47.04	53.04	41.30	38.38
37	55.42	63.50	69.32	57.71	54.84

Tolerances	Dwg. No.	7905D03007		Title:	
x = ±0.5	Projection	⊕ ⊖		7905 Series D-SUB Straight Wire Wrap Type	
.x = ±0.25	Unit	mm	Scale		1:1
.xx = ±0.15	Drawn By	Martin 07/18'22			

OUPIIN
OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 7905-xxMTBWG00A&7905-xxFTBWG00A

SHEET	1/1	Ver.No.	A7
-------	-----	---------	----