
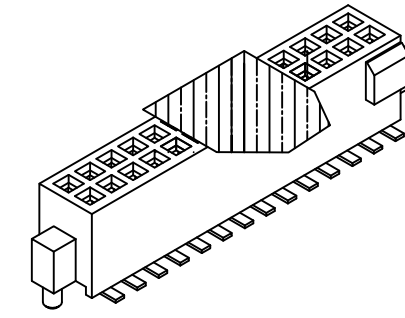


REV.	SPECIFICATION	ECN NO.	APPD.
R5		ECN220843	

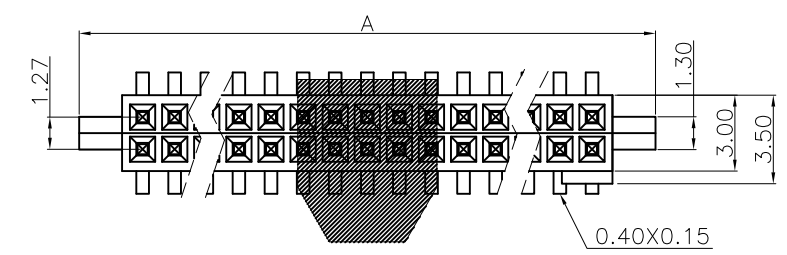

Material and Plating:




Housing: LCP , UL94V-0 ,Black .
 Contacts: Phosphor Bronze.
 Gold Plated on Contact Area and 80u" Min Tin Plated or Gold Flash on Solder Tail over Nickel 50u" Min .

Electrical Characteristics:

Current Rating: 1 AMP.
 Dielectric Withstanding Voltage: AC 500V For 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 20mΩmax. at DC 100mA.
 Operating Temperature: -65°C ~ +125°C.

***RoHS Compliant**

Insertion Depth: 1.90mm to 2.90mm

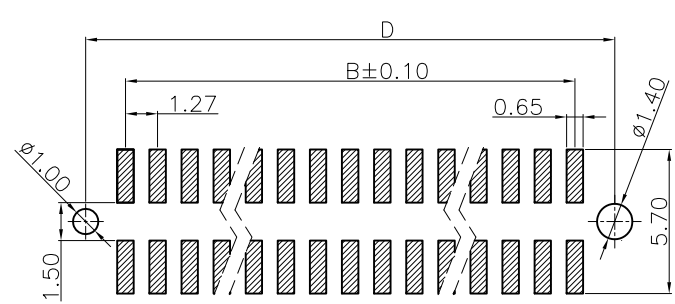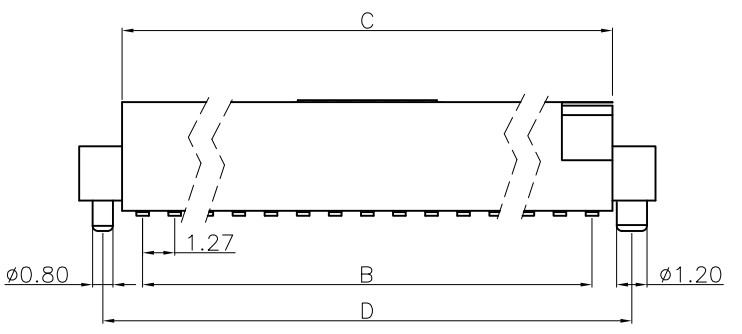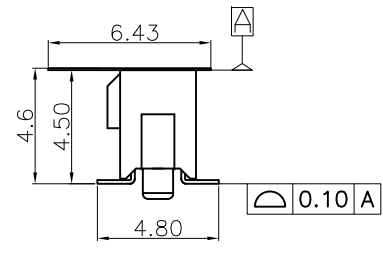

P.C. Board Layout
(Tolerance ±0.05mm)

2243- xx C xx D P T -S
 Series: S:Mylar
 No.of Position: T: Tape & Reel Package, U: Tube Package
 C: Selective Gold Plated, G: Gold Plated
 P: With Post, D: Surface Mount
 00: G/F
 10: 10μ"
 15: 15μ"
 30: 30μ"

Position	10 Thru 100
Dimension	
A	1.27 X No. of Positions/2 +3.78
B	1.27 X No. of Positions/2 -1.27
C	1.27 X No. of Positions/2 +0.38
D	1.27 X No. of Positions/2 +1.91

Tolerances	Dwg.No.	2243D02020
x = ±0.50	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	CCH8/20/22

Title:
 2243 Series
 P.C.B. Socket
 1.27mmX1.27mm

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 2243-xxCxxDPT-S			
SHEET	1/1	Ver. No.	R5