
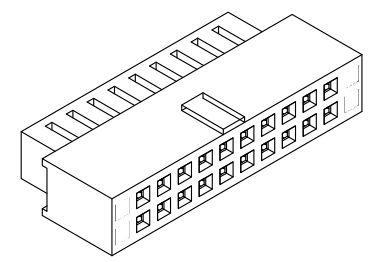





REV.	SPECIFICATION	ECN NO.	APPD.
R3		ECN110602	

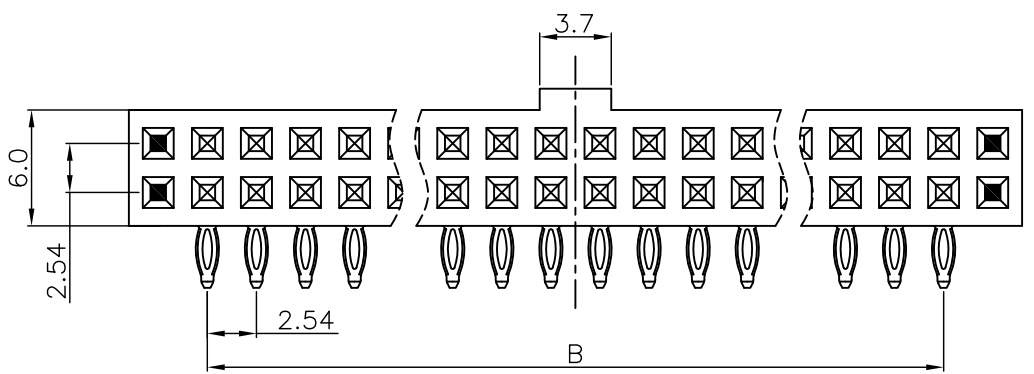

Material:
Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:
Current Rating: 2 AMP.
Dielectric Withstanding Voltage : AC 1000V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C ~+105°C .

***RoHS Compliant**
Insertion Depth: 2.55mm to 5.70mm.

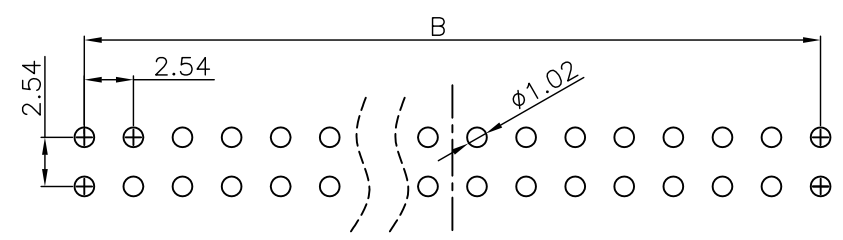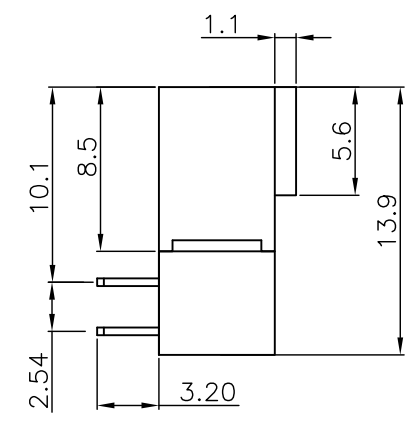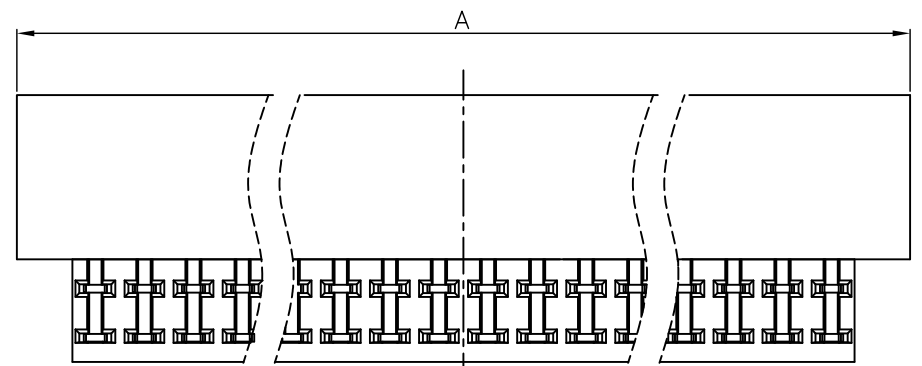

P.C. Board Layout
(Tolerance:±0.05)

2046-xxGxxRPA
 Series: xx
 No.of Contacts: G
 G: Gold Plated
 T: Tin Plated
 R: Right Angle
 P: Press Fit Type
 A: Tray Package
 B: Bulk Package
 Blank: Dip Type

00: G/F
 10: 10 μ"
 15: 15 μ"
 30: 30 μ"

Position	6 Thru 64
Dimension	
A	2.54 X (No. of Position+4)/2
B	2.54 X (No. of Position)/2-2.54

Tolerances	Drawn No.	2046-D0000-003	Title:	
x = ±0.5	Projection		2046 Series	
.x = ±0.25	Unit	mm	P.C.B. Socket 2.54mmX2.54mm	
.xx = ±0.15	Scale	1:1	(0.100"X0.100")	
	Drawn By	tanzhiwu 06/11'11		

OUPIIN
OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 2046-xxGxxRPA

SHEET	1/1	Ver. No.	R3
-------	-----	----------	----