


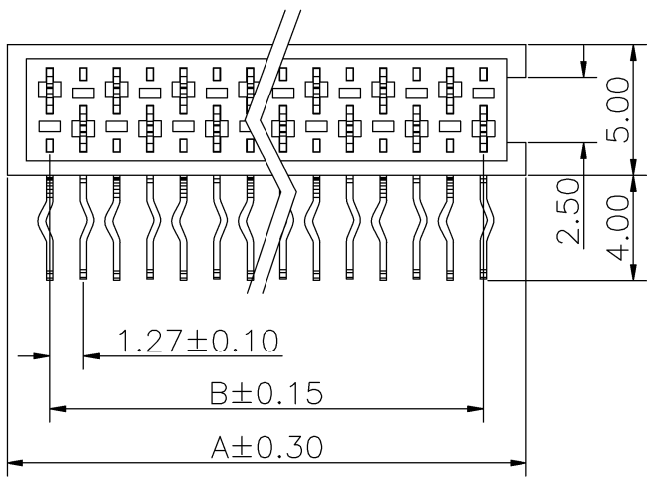



REV.	SPECIFICATION	ECN NO.	APPD.

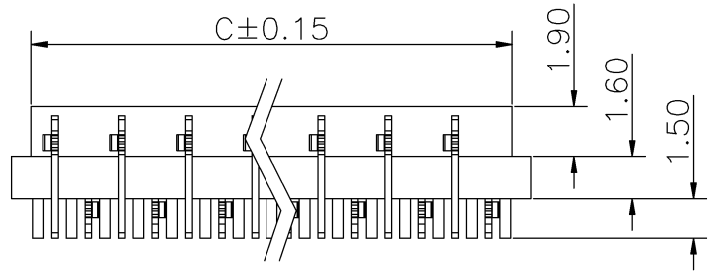


Mating With 6012 Series

Material:
Housing: PA9T, UL94V-0.
Contacts: Phosphor Bronze, Matte Tin Plated over Nickel 50u".
Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 500V.
Insulation Resistance: 1000MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -40°C~+105°C.
***RoHS Compliant**



Positions	A	B	C
04	7.00	3.81	5.60
06	9.54	6.35	8.14
08	12.08	8.89	10.68
10	14.62	11.43	13.22
12	17.16	13.97	15.76
14	19.70	16.51	18.30
16	22.24	19.05	20.84
18	24.78	21.59	23.38
20	27.32	24.13	25.92
22	29.86	26.67	28.46
24	32.40	29.21	31.00
26	34.94	31.75	33.54

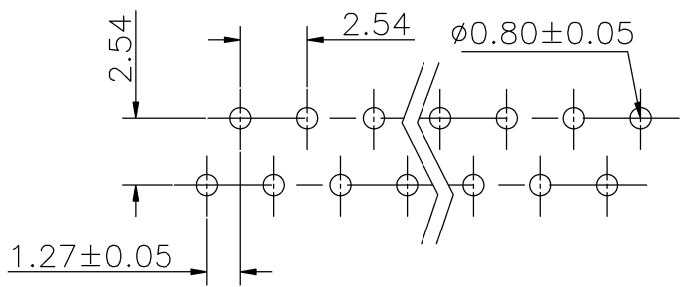

PCB Layout

Series: 6022-C
No. of Positions: xx
MT: Matte Tin Plated
R: Red
R: Right Angle
U: Tube Package

Tolerances	Dwg. No.	S2620221128-03
.x = ±0.20	Projection	
.xx = ±0.15	Unit	mm
	Scale	1:N
	Drawn By	Martin 11/28'22

Title: 6022-C Series
Micro-Match Miniature
Right Angle Type

OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 6022-CxxMTRRU			
SHEET	1/1	Ver.No.	X1