


REV.	SPECIFICATION	ECN NO.	APPD.







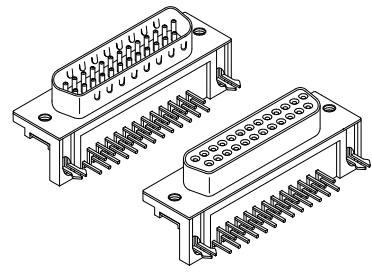


Material:
Housing: PA9T, Glass-Filled, UL94V-0.
Contacts: Brass, Gold Flash over Nickel 80μ".
Shell: Steel, Nickel Plated.

Electrical Characteristics:
Voltage Rating: AC 250V.
Current Rating: 3 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C~+105°C.
***RoHS Compliant**


Male

Female

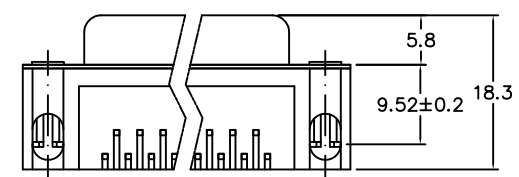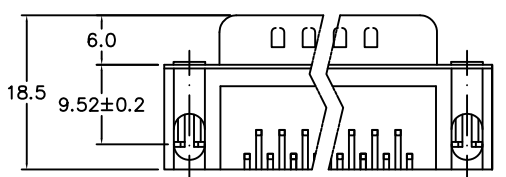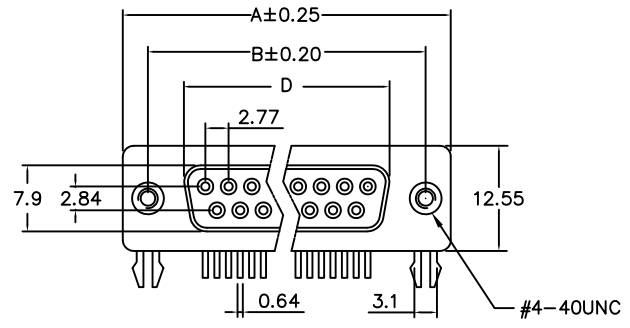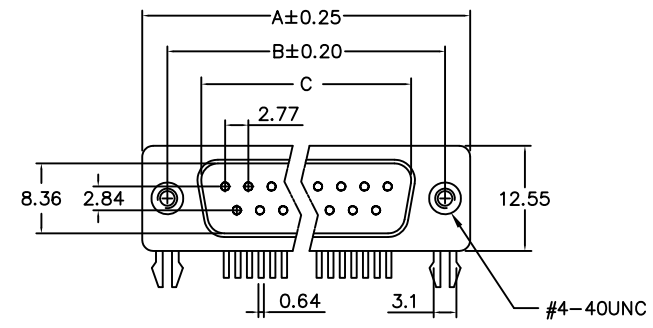

7906-A **xx** **M** **x** **A** **-HT**
Series Position M: Male B: With Grounding Forks and A: Tray Package HT: High Temperature
F: Female With Riveted Threaded Inserts With Riveted Threaded Inserts and with Plastic
H: With Grounding Forks Jack Screws are Bagged Separately
Y: With Grounding Forks With Riveted Threaded Inserts and with Jack Screws Attached

Position	Dimension			
	A	B	C	D
9	30.81	24.99	16.92	16.33
15	39.14	33.32	25.25	24.66
25	53.04	47.04	38.96	38.38
37	69.32	63.50	55.42	54.84

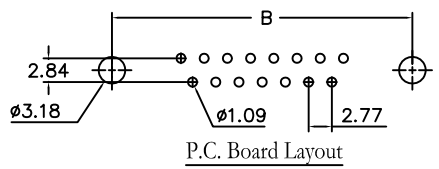

Tolerances	Dwg. No.	7906D03023	Title:	
x = ±0.25	Projection		7906 Series	
.x = ±0.20	Unit	mm	Scale	1:1
.xx = ±0.15	Drawn By	Scott 04/12'16	D-SUB Right Angle Type	

① 747

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 7906-AxxMxA-HT&7906-AxxFxA-HT			
SHEET	1/1	Ver.No.	A2