

REV.	SPECIFICATION	ECN NO.	APPD.

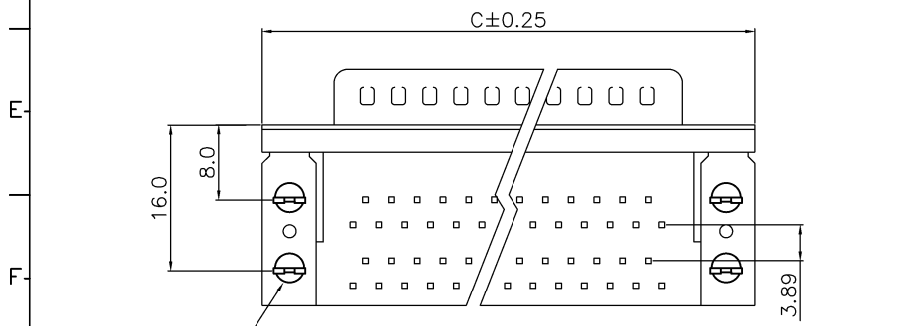
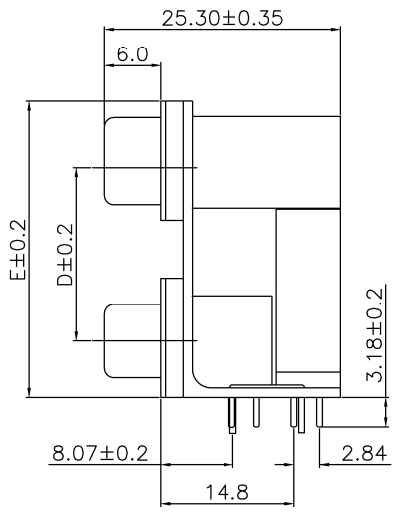
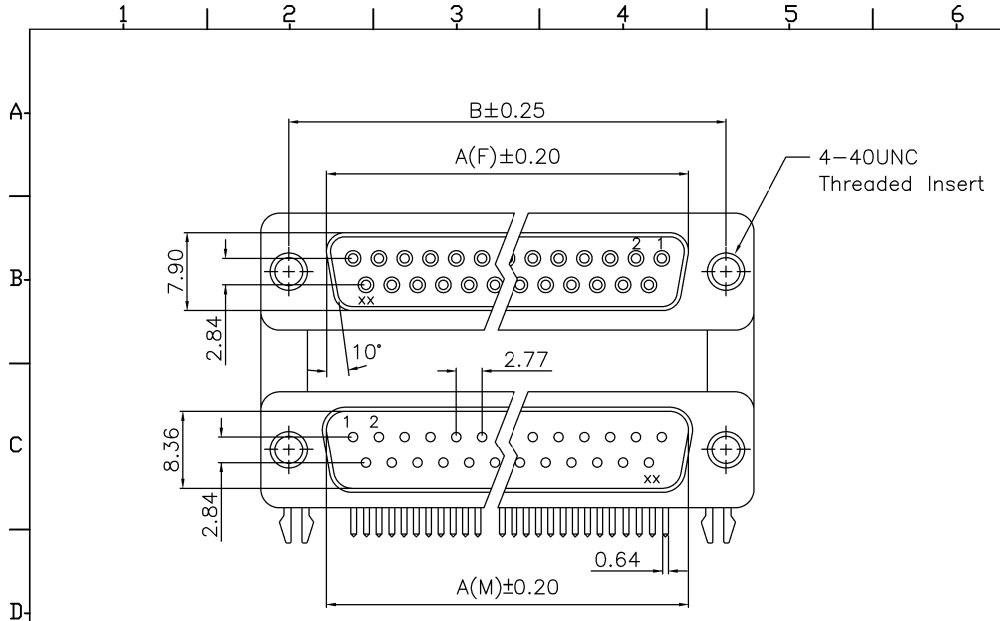
Material:

Housing: PBT, UL94V-0, Black.
 Contacts: Brass, Gold Plated over 30u" Nickel Plated.
 Shell: Steel.

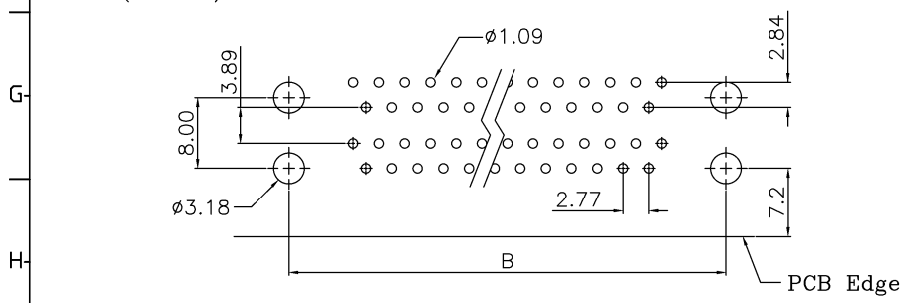
Electrical Characteristics:

Current Rating: 1 AMP.
 Dielectric Withstanding Voltage: AC 1000V.
 Insulator Resistance: 1000MΩ min.
 Contact Resistance: 30mΩ max.
 Operating Temperature: -20°C~+70°C.

***RoHS Compliant**





7936- xx F M B x A
 Series Position F: Female M: Male B: Grounding Fork x 1:15.88 See Dim:D A:Tray Package
 Top Bottom 2:19.05 See Dim:D



P.C. Board Layout

Position	Dimension							
	A(M)	A(F)	B	C	D		E	
9	16.92	16.32	24.99	30.81	15.88	19.05	28.43	31.60
15	25.25	24.66	33.32	39.14	15.88	19.05	28.43	31.60
25	38.96	38.38	47.04	53.04	15.88	19.05	28.43	31.60

Tolerances	Dwg. No.	7936D03023		Title:		 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 7936-xxFMBxA SHEET 1/1 Ver.No. A3			
x = ±0.50	Projection			7936 Series					
.x = ±0.25	Unit	mm	Scale	D-SUB Double Port					
.xx = ±0.15	Drawn By	Martin	09/29'22	Right Angle Type					
				Φ512					